

Zeitschrift: Swiss express : the Swiss Railways Society journal
Herausgeber: Swiss Railways Society
Band: - (2018)
Heft: 135

Rubrik: Modelling news

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 24.02.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



TOP: The left hand side of the loco. BOTTOM: The right hand side of the loco. Photos: John Jesson

Review of the Piko HO scale SBB Ae 4/7

John Jesson

The Prototype

Introduced from 1927, the Ae 4/7 was a mainstay of the Swiss Federal Railways for many years. 127 were built over a 7-year period and lasted until around the turn of the century. The main visual difference between class members as built was to locos 10973 – 11002. These locos were built with additional and modified equipment for working more heavily-graded routes such as the Simplon and Gotthard/Monte Ceneri and were heavier, exceeding the laid-down figure for weight per metre by a small margin. The rather novel solution was to mount the buffers on timber baulks 170mm thick on the buffer beams, thus increasing the length of the loco by 340mm and dropping the weight/metre within the permitted figure. When built, the locos had a cab door on the RH side of each cab. From about the mid-50's the cab door was fixed closed and the associated handrails and steps removed, access being by means of the angled door on the LH side of the cab. Other visible alterations were to the roof-mounted equipment, of which there are several variations, and replacement of the headlights.

The Model

The model captures the look of the prototype very well and depicts 10990, built by SLM/MFO in 1931 with the extended buffer beams. The shade of green looks about right to me and the grey is the original, darker shade. All of the inscriptions are printed gold on black and are legible under a powerful magnifying glass. Not depicted is any depot allocation, although a silver stripe has been applied in the correct positions each side, on the edge of the footplating. To the best of my knowledge, this should be gold. The windows on the corridor side have simulated internal protection bars, but these have been left unpainted, so are not obvious. The vertical white stripes on the cab side windows are very clear. The cab doors are depicted as

out of use, with no handrails or steps. The front top headlights are the double type, with separate red light above the white.

Below the footplate, the Buchli drive and framework, and the cooling pipes on the opposite side, are all finely moulded, as are all the other parts, such as equipment boxes, air and brake cylinders, speedo drive and, on the 4-wheel bogie, Indusi magnets. Buffers are plastic and unsprung, with rectangular heads. On the roof, the model is fitted with two pantographs of the older type, with crossed diagonal bars on the upper sections. The simulated roof wiring is plastic and finished red, mounted on black insulators. Roof walkways are brown, everything else is silver. The roof "furniture" is two squarish boxes with side ventilation and was the style of the MFO-equipped locos 10973 - 11002. Later on, from the 1960's, the equipment was modified with different casings.

Inside, the model follows the usual format of a main chassis block of cast metal, surrounding a centrally-mounted motor with two flywheels. This drives the outer two driving axles through gearboxes. Mounted on top of the motor and chassis block is a printed-circuit board. The DCC connection is mounted on this and is a PluX22 interface. The version I have is the DC version, but a digital sound version is available. The body attaches with two screws just behind each buffer beam. When the screws are undone, the body just lifts off – no clips to disengage.

NEM coupler boxes are fitted at both ends to the 4-wheel and 2-wheel trucks. That, on the 2-wheel truck droops somewhat, enough to guarantee inadvertent uncoupling of my Kadee couplings. This is not an easy problem to overcome; my solution has been to mount a Kadee #20 to the body, using the chassis fixing facility. The driving wheels have the correct 16 spokes, and the pony wheels 9 spokes, also correct. Traction tyres are fitted to one of each of the outside sets of driving wheels. Back-to-back measurements are variable, but all within limits for normal NEM standards. Pick-up is from both centre

MODELLING NEWS

pairs of driving wheels (both sides), all bogie wheels and one side of the pony truck. Both centre pairs of driving wheels are sprung to ensure contact with the track, as is the pony truck.

I fitted a DCC chip and tested the loco on my layout. Maximum speed was too high, somewhere in the region of a scale 150 kph, but the loco is a smooth runner. Piko have installed electronics to independently control the single tail light. The headlights are controlled by the usual CV0, but the taillight is turned on and off through CV's 2 and 3, depending on whether the loco is travelling forward or reverse.

The hauling capacity was disappointing – three bogie

coaches was about the most it could handle. I was unable to find a solid reason for this, but suspected that having the traction tyres in diametrically opposite positions might be a factor. To test this, I swapped the traction tyre fitted wheels to the same axle (I put them both on the 4th axle, but they could go on the 1st axle). The difference has been remarkable. The loco will now haul an 8-coach express up the gradients, but this seems to be the limit. Swapping the wheels was an easy job, but extreme care is needed when putting all the driving wheel sets back, as it is very easy to trap and bend the current pick-ups. 

(All dimensions in mm)	1:1	1.87	Model
Length over buffers	17100	196.6	196.0
Width over body	2950	33.9	33.9
Height of roof	3800	43.7	45.0
Driving wheels	1610	18.5	18.5
Pony wheels	950	10.9	10.8
Wheelbase (bogie)	2200	25.3	25.0
Wheelbase (bogie to 1st driving axle)	2155	24.8	24.9
Wheelbase (1st driving axle to 2nd driving axle)	1950	22.4	22.4
Wheelbase (2nd driving axle to 3rd driving axle)	1950	22.4	22.4
Wheelbase (3rd driving axle to 4th driving axle)	1960	22.5	22.5
Wheelbase (4th driving axle to trailing axle)	2460	28.3	28.2
Weight	123 tons		421 g
Back-to-Backs			14.26 – 14.43
Maximum speed	100 kph		


Cardboard Modelling

Most of us know that modelling Swiss Railways in any scale is expensive. However, Brian Shaw came across an old, but much cheaper, option at a recent tram exhibition in Manchester. It was a 1965 publication that enabled the modeller to carefully colour-in the card pages, cut them out with scissors and make a model of a triebwagen and pendelzug, plus a road vehicle, a few people and some platform furniture. Back then it would have kept children

amused for hours – adults also!

However, today's youngsters (and some adults) aren't quite so patient so a modern version was produced by the BLS, one of a Class 465 and 3 coaches and another for a Nina RABe 525 set. To speed up the construction, these came pre-coloured and cut so that each piece just had to be pressed out.

Now, who's up for motorising one of these for an exhibition layout ??? 

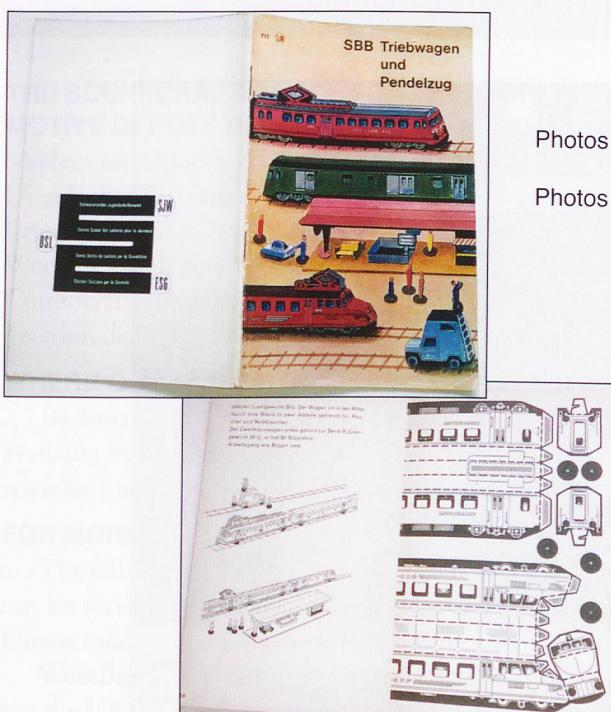

Photos of old book – Brian Shaw.

Photos of new card kit – Tony Bagwell.



MODELLING NEWS

Building a Modern Locomotive Depot

Peter Marriott



The completed diorama. Roco BLS Vectron and Kibri Tm 235 on shed.

All photos: Peter Marriott

Bachmann Scenecraft readymade structures reduce the building time of making layouts in these days of limited modelling time. The quality of the products ensures we can build good-looking model railway layouts a lot quicker than having to scratchbuild everything ourselves. Bachmann's Scenecraft range has an expanding number of buildings, structures and accessories for N, HO and OO scales for rural and urban locations, with some models specifically for the European market under the Liliput banner. I used a modern servicing shed to play host to my growing number of BLS

locomotives. The diorama was made on a baseboard measuring 81cm x 40cm, which is the size of the baseboard determined by the interior dimensions of the glass display cabinets on the Bachmann stand at the major model railway exhibitions. This diorama took around 20 hours (plus the drying time of the adhesives and paints) to make this scene. The buildings and some of the figures used in the scene are OO scale, but is the difference noticeable compared to the HO scale locomotives? I do not think it is worth worrying about. 



MODELLING NEWS



ABOVE: Roco BLS Class 420 stands alongside the shed.

TOP RIGHT: A busy day for the track team.

LOWER RIGHT: Yard lights were installed using Woodland Scenics Just Plug components which are very easy to work with.

BETWEEN: The Scenecraft Modern Servicing Depot building is the centrepiece of this project. It comes fully painted and assembled.

BETWEEN LEFT: The Vectron receives attention inside the shed.



THE SCENECRAFT RANGE FOR MODERN MOTIVE DEPOTS IN OO/HO SCALE

Modern servicing shed	44 017;
Diesel refuelling point	44 044;
Concrete bollards	44 531
Wooden yard lamps	44 561;
Commercial lid skips	44 501;
Traction depot workers	36 051

WHERE CAN I BUY THESE?

Bachmann Scenecraft and Woodland Scenics products are available from dealers throughout the UK and in Europe. Go to www.bachmann.co.uk to find your closest dealer in the UK.

FOR MORE MODELLING INFORMATION

The full range of **Bachmann Scenecraft** buildings and accessories can be accessed through the 2018 Bachmann, Graham Farish and Liliput catalogues, or by going to www.bachmann.co.uk.

Woodland Scenics products are available from dealers throughout the UK.

Where's Heidi?

Answer. The wooden SBB logo is at Zofingen. 

