

Approximative method of analysis for rectangular reinforced concrete plates under uniformly distributed or hydrostatic load

Autor(en): **Bijlaard, P.P.**

Objektyp: **Article**

Zeitschrift: **IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht**

Band (Jahr): **3 (1948)**

PDF erstellt am: **20.09.2024**

Persistenter Link: <https://doi.org/10.5169/seals-4037>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

IVb1

**Calcul approché des dalles rectangulaires en béton armé
pour une charge uniformément répartie ou hydrostatique**

**Näherungsmethode zur Berechnung von rechteckigen Platten
aus Eisenbeton bei gleichmässig verteilter
und hydrostatischer Belastung**

**Approximative method of analysis for rectangular reinforced
concrete plates under uniformly distributed or hydrostatic load**

PROF. IR. P. P. BIJLAARD

Technische Hoogeschool Delft, Technical adviser I. A. B. S. E.

Introduction

As a direct integration of the differential equation of the plate is in general not possible for rectangular plates, supported at the edges, several methods have been developed to cope with this difficulty, using double and single Fourier series, differences equations, etc. Some of these methods lead to sufficiently accurate results. They are, however, rather laborious, especially if all kinds of boundary conditions have to be taken into account, whilst no usable general formulae for bending moments, etc. are obtained. It is true Marcus⁽¹⁾ gave relatively simple formulae for rectangular plates with uniformly distributed load, but these have not been derived directly. They have been composed in such a manner that they approximate as much as possible the results of his more accurate calculation⁽²⁾, which leads only to numerical results.

At the other hand our method⁽³⁾ is rather simple and gives a clear insight in the way in which the plates carry the load. Moreover it leads

(1) MARCUS, *Die vereinfachte Berechnung biegsamer Platten*, Springer, Berlin, 1925.

(2) MARCUS, *Die Theorie elastischer Gewebe und ihre Anwendung auf die Berechnung biegsamer Platten*, Springer, Berlin, 1924.

(3) BIJLAARD, *De Ingenieur*, n° 26, 1934, n° 23, 1935; *De Ingenieur in Ned. Indië*, n° 12, 1935; *Proc. Third Engineering Congress*, Tokio, 1936.

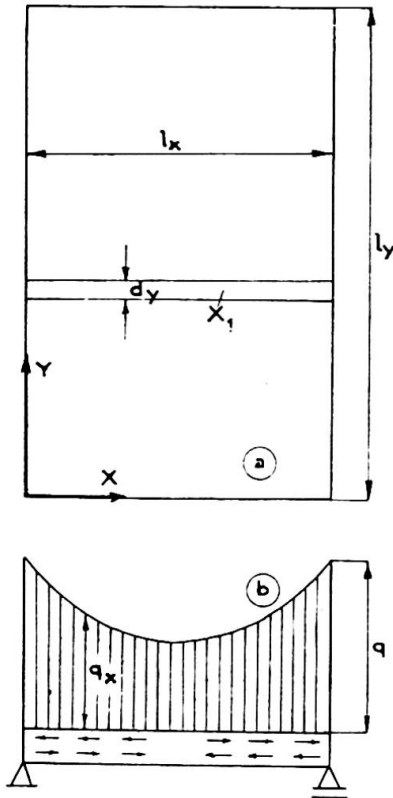


Fig. 1.

to simple general formulae for the maximum bending moments as functions of the ratio $\varepsilon = l_y/l_x$ of the sides, which are similarly built for all boundary conditions, for uniformly distributed as well as for hydrostatic load. Furthermore our formulae are more accurate than those of Marcus.

Simply supported plates

Let us consider first a rectangular plate (fig. 1a) with simply supported edges, carrying an arbitrary load $q = f(x, y)$. An arbitrary X-strip, X_1 , of this plate, having a breadth dy , will only have to carry a vertical load q_x , the remainder of the load q being carried by the vertical shearing forces acting on its sides. The bending moment per unit breadth of the strip, due to this vertical load q_x , we denote by M_{xv} .

As, however, also twisting moments M_{yx} and $M_{yx} + \frac{\partial M_{yx}}{\partial y} dy$ are acting on the sides of the strip, which cause bending moments $M_{x\tau}$ per unit breadth of its cross sections, the real bending moment per unit breadth of the strip amounts to

$$M_x = M_{xv} + M_{x\tau} \quad (1)$$

so that

$$M_{xv} = M_x - M_{x\tau} \quad (2)$$

We know that ⁽⁴⁾

$$M_x = -D \left(\frac{\partial^2 w}{\partial x^2} + \nu \frac{\partial^2 w}{\partial y^2} \right) \quad (3)$$

⁽⁴⁾ TIMOSHENKO, *Theory of Plates and Shells*, 1940, p. 88.

whilst

$$M_{y,x} = -D(1 - \nu) \frac{\partial^2 w}{\partial x \partial y}$$

acting on strip X_1 as indicated in fig. 1b. Consequently the total moment exercised per unit length of the strip by the twisting moments $M_{y,x}$ and $M_{y,x} + \frac{\partial M_{y,x}}{\partial y} dy$ is

$$\frac{\partial M_{y,x}}{\partial y} dy = -D(1 - \nu) \frac{\partial^3 w}{\partial x \partial y^2} dy$$

acting on the strip in the opposite direction of the arrows in fig 1b. Hence the bending moment $M_{x,x}$ per unit breadth of the strip, caused by the twisting moments, amounts to

$$M_{x,x} = -D(1 - \nu) \int_x^{l_x} \frac{\partial^3 w}{\partial x \partial y^2} dx = -D(1 - \nu) \left[\frac{\partial^2 w}{\partial y^2} \right]_x^{l_x} = D(1 - \nu) \frac{\partial^2 w}{\partial y^2} \quad (4)$$

a similar result being already obtained by Marcus.

But with eqs. (3) and (4) it follows now from eq. (2) that

$$M_{xv} = -D \left(\frac{\partial^2 w}{\partial x^2} + \frac{\partial^2 w}{\partial y^2} \right) \quad (5)$$

whence we obtain, by changing x and y

$$M_{yv} = -D \left(\frac{\partial^2 w}{\partial x^2} + \frac{\partial^2 w}{\partial y^2} \right) \quad (6)$$

so that we draw the conclusion that

$$M_{xv} = M_{yv} \quad (7)$$

Hence at any point of a rectangular plate with simply supported edges and arbitrary load, the bending moment M_{xv} per unit breadth, that would occur in an X-strip, if it had to carry its total vertical load q_x as a simple beam, without being discharged by the twisting moments $M_{y,x}$, is equal to the bending moment M_{yv} , occurring at the same point in an Y-strip, if it would have to carry its total vertical load q_y as a simple beam, whilst of course

$$q_x + q_y = q \quad (8)$$

At the other hand we know that, according to eq. (3), whence M_y follows by changing x and y , we have

$$M_x + M_y = -D(1 + \nu) \left(\frac{\partial^2 w}{\partial x^2} + \frac{\partial^2 w}{\partial y^2} \right) \quad (9)$$

so that it follows from eqs. (5) and (6) that

$$M_x + M_y = (1 + \nu) M_{xv} = (1 + \nu) M_{yv} \quad (10)$$

With structures in reinforced concrete, where Poisson's ratio is usually equated to zero, this yields

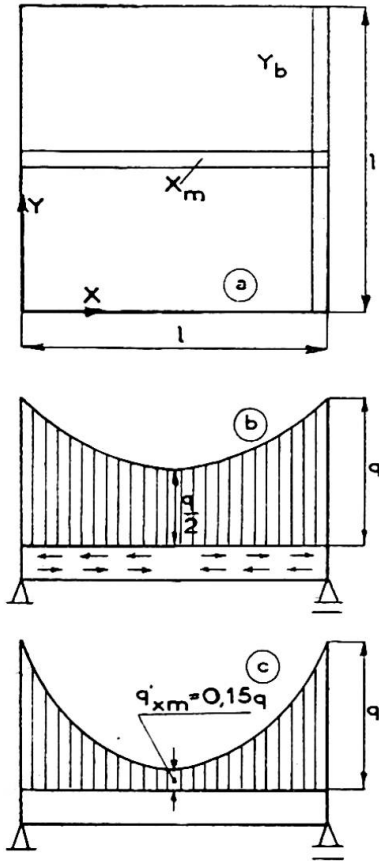


Fig. 2.

$$M_x + M_y = M_{xv} = M_{yv} \tag{11}$$

or $M_x = M_{xv} - M_y \tag{12}$

and $M_y = M_{yv} - M_x \tag{13}$

Furthermore it follows from eq. (4) and also by comparison of eqs. (1) and (12) that, with $\nu = 0$,

$$M_{xv} = -M_y \tag{14} \quad \text{and} \quad M_{yv} = -M_x \tag{15}$$

the latter equation following from the first one by changing x and y .

For example we shall use eq. (11) in order to find the bending moment in the centre of a square plate with sides l which carries a uniform load $q = \text{const.}$ (fig. 2 a). As at the edges $M_x = M_y = 0$ according to eq. (10) in any section of a boundary strip Y_b the moment M_{yv} will be zero too, so that for these strips q_y must be zero. Therefore, according to eq. (8), at $x = 0$ and $x = l$ the middlemost X -strip X_m has to carry a load $q_x = q$, whilst at $x = l/2$, on account of symmetry, $q_x = q_y = q/2$, so that q_x is distributed according to fig. 2b. Assuming a parabolic limitation of q_x we find that in the middle of X_m

$$M_{xv} = \frac{1}{8} q l^2 - \frac{5}{48} \frac{q}{2} l^2 = \frac{7}{96} q l^2$$

so that, because in the centre of the plate $M_x = M_y$, eq. (11) yields

$$M_x = M_y = \frac{1}{2} M_{xv} = \frac{7}{192} q l^2 = 0.0365 q l^2 .$$

According to Nadai ⁽⁵⁾ the real bending moment with $\nu = 0$ is $0.0368 q l^2$, so that our result is sufficiently accurate.

In order to find the equation of the deflection surface we remark that according to eq. (14) the moment M_{xv} in X_m is distributed as $-M_y$, consequently practically as the negative deflection w_x of X_m , so that it may be

⁽⁵⁾ NADAI, *Elastische Platten*. Berlin, 1925.

assumed to be caused by a fictitious load, being distributed according to the second differential quotient of w_x , consequently as $-M_x$. Assuming again a parabolic limitation of the total fictitious load q_x' according to fig. 2c, it follows that

$$M_{x_m} = \frac{1}{8} q l^2 - \frac{5}{48} (q - q'_{x_m}) l^2 = \frac{7}{192} q l^2$$

or $q'_{x_m} = 0.15 q$. The deflection w_x of X_m follows from q_x' by integrating four times and dividing by EI . Assuming the deflections of the other X-strips to be proportional to those of X_m , we obtain in this way the deflection surface of the square plate

$$w = \frac{8}{104\,175} \frac{q l^4}{EJ} (24 \xi - 65 \xi^3 + 75 \xi^4 - 51 \xi^5 + 17 \xi^6) \\ (24 \eta - 65 \eta^3 + 75 \eta^4 - 51 \eta^5 + 17 \eta^6) \quad (16)$$

in which $\xi = x/l$ and $\eta = y/l$ and from which the bending and twisting moments at any point may be calculated immediately. These are situated fairly between the values obtained by Marcus ⁽²⁾ and Lewe ⁽⁶⁾, as was shown in our third paper in footnote 3. In a similar way we found for a square plate with a hydrostatic load $q = xp/l$ the deflection surface

$$w = \frac{8}{2\,187\,675} \frac{\rho l^4}{EJ} (208 \xi - 217 \xi^3 - 42 \xi^5 + 51 \xi^7) \\ (24 \eta - 65 \eta^3 + 75 \eta^4 - 51 \eta^5 + 17 \eta^6) \quad (17)$$

Various boundary conditions

If an X-strip is for example fixed at two sides (fig. 3), the moment $M_{x\tau} = -M_y$, that would be caused in it by the twisting stresses τ_{yx} if it were simply supported, being $-M_{y_m}$ in the middle of the strip, will cause moments $\varphi_{xc} M_{y_m}$ at the clamped edges (fig. 3b and 3c), by which at the crossing M of the most loaded strips X_m and Y_m we get, instead of eqs. (12) and (13)

$$M_{x_m} = M_{xv} - \varphi_x M_{y_m} \quad (18)$$

and

$$M_{y_m} = M_{yv} - \varphi_y M_{x_m} \quad (19)$$

As for example along X_m the moment $M_{x\tau} = -M_y$ is about proportional to the deflection w_x of X_m , values φ_x or φ_y may be calculated if the ratios of the ordinates of w_x or w_y are known.

Also to this effect we remark that, by the twisting moments M_{xy} alone, the Y-strips, that cross X_m , would obtain deflections $w_{y\tau}$ according to curve 1 in fig. 3d, being proportional to $M_{y\tau} = -M_x$. As at their crossing with X_m their real deflections coincide with the deflection w_x of X_m , given by curve 2, the part q_y they take there of the total load q will be about proportional to $w_x - w_{y\tau}$, being the distance between curves 1 and 2. Assuming a uniformly distributed load q , we therefore find the

(6) LEWE, *Pilzdecken*, Berlin, 1926.

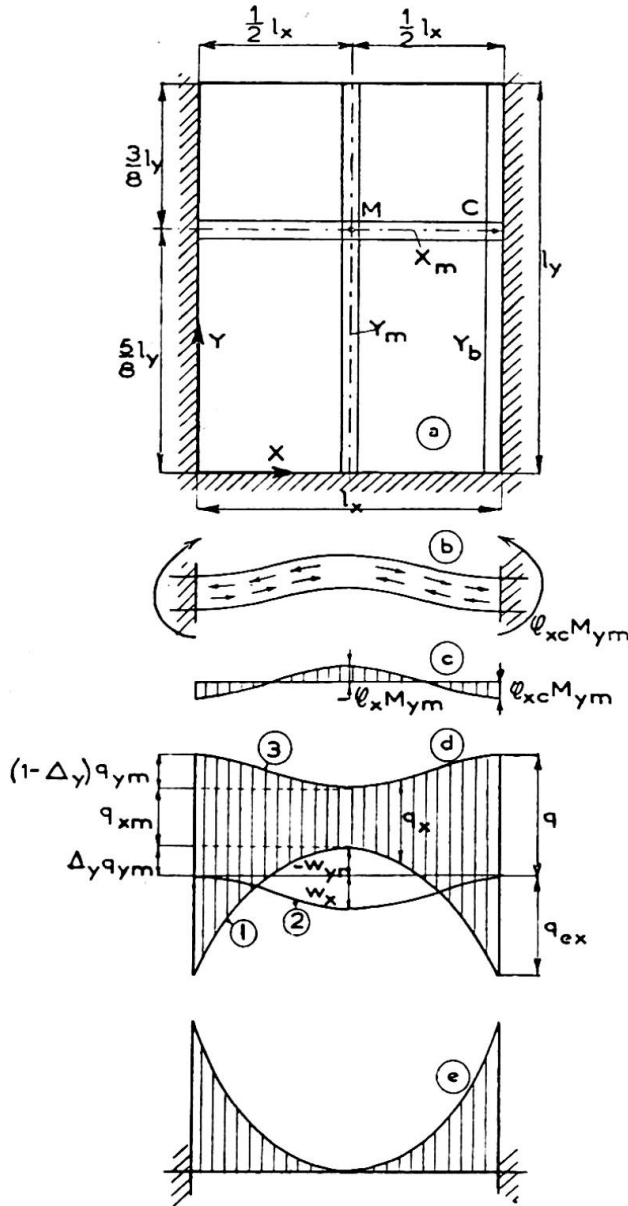


Fig. 3.

vertical load q_x on X_m by drawing curve 3 at a distance q above curve 2, load q_x being denoted by cross hatching. It follows that near a clamped edge the Y-strips cause an excess load q_{ex} on X_m instead of discharging it. Value q_{ex} was computed from the condition that the load q_y , taken by the boundary strip Y_b , being $q_y = -q_{ex}$ at C, has to cancel the bending moments

$$M_{y\tau} = -M_{xc}$$

caused by the twisting stresses τ_{yx} , in which M_{xc} is the mo-

ment M_x along the clamped edge. For a square plate with all edges built in q_{ex} is e.g. $0.61 q$.

At the crossing M of the most loaded strips (fig. 3a)


$$q_{xm} + q_{ym} = q \tag{20}$$

whilst the deflections of X_m and Y_m in M must be equal. Expressing these deflections in the maximum positive moments M_{xm} and M_{ym} and assuming for that the same relations which hold for uniform load, this condition gives us the relation

$$M_{xm} = \mu \varepsilon^2 M_{ym} \tag{21}$$

in which $\varepsilon = l_y/l_x$, whilst for the six cases we considered (fig. 4, where a single line denotes a simply supported and cross hatching a clamped edge) μ is 1, 1, 1, 0.6, $32/45$ and $27/32$ respectively. Furthermore in fig. 3d the deflection $w_{y\tau}$ of Y_m is the result of the twisting moments M_{xy} ,

Fig. 4.

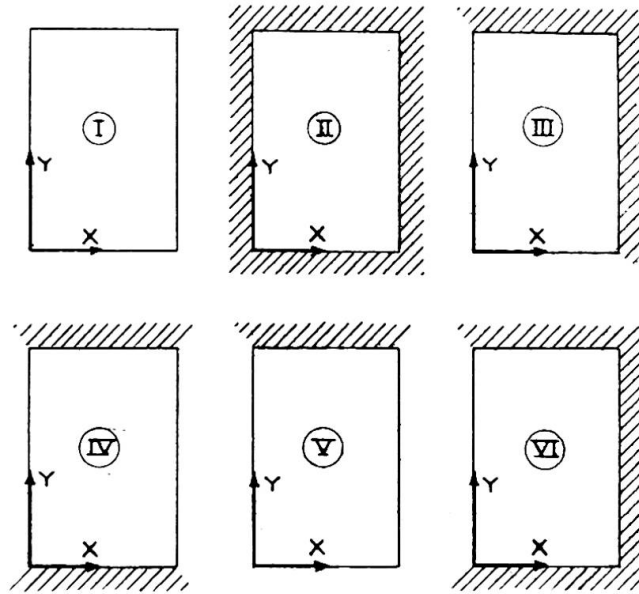

which cause in M a moment $-\varphi_y M_{xm}$ in Y_m . At the other hand w_x may be considered to be the result of the actual bending moment M_y in Y_m , being M_{ym} in M, so that, according to eq. (21) and fig. 3d we have e.g.

$$\Delta_y = \frac{-w_{y\tau}}{w_x - w_{y\tau}} = \frac{\varphi_y M_{xm}}{M_{ym} + \varphi_y M_{xm}} = \frac{\mu \varepsilon^2 \varphi_y}{1 + \mu \varepsilon^2 \varphi_y} \tag{22}$$

We could show ⁽³⁾ that for values ε between 0.5 and 2 it is sufficiently accurate to assume curve 1 in fig. 3d, the ordinates of which are proportional to $-M_x$, as a parabola, if M_{xm} and M_{ym} are considered as the maximum positive moments in the strips and not always as those in M. Then also curve 3, being proportional to w_x , may be easily found. For we showed above here that the effect of the twisting stresses on X_m is equivalent to that of a fictitious load proportional to $-M_x$, so that the deflection w_x is between that by a uniform and that by a parabolic load, the latter being indicated in fig. 3e. With known shapes of w_x and w_y values φ_x , φ_{xc} , φ_y and φ_{yc} can also be computed. The only unknown values in fig. 3d being now q_{xm} and q_{ym} , we may calculate

$$M_{xv} = m(q_{xm} + eq_{ym} + fq_{cx})l_x^2 \tag{23}$$

whilst in the same way we find

$$M_{yv} = n(q_{ym} + gq_{xm} + hq_{cy})l_y^2. \tag{24}$$

Consequently we have six equations, (18), (19), (20), (21), (23) and (24), with six unknown values, q_{xm} , q_{ym} , M_{xv} , M_{yv} , M_{xm} and M_{ym} . In this way we got the maximum positive moments M_{xm} and M_{ym} , whence we obtain also the clamping moments

$$M_{xc} = M_{xvc} + \varphi_{xc} M_{ym} \tag{25}$$

and
$$M_{yc} = M_{yvc} + \varphi_{yc} M_{xm}. \tag{26}$$

For values $\varepsilon = l_y/l_x$ between 0.5 and 2 we got

$$\left. \begin{aligned} &M_{xm} = mq_x' l_x^2 \quad \text{and} \quad M_{ym} = nq_y' l_y^2 \\ \text{with} \quad &q_x' = \beta \frac{\varepsilon^4}{\varepsilon^4 + \gamma \varepsilon^2 + \alpha'} q, \quad q_y' = \beta \frac{\alpha}{\varepsilon^4 + \gamma \varepsilon^2 + \alpha'} q \end{aligned} \right\} \tag{27}$$

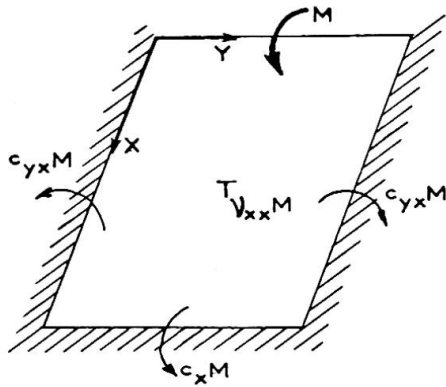


Fig. 5.

$$\left. \begin{aligned} & M_{xc} = m_c q_{xc}' l_x^2 \quad \text{and} \quad M_{yc} = n_c q_{yc}' l_y^2 \\ \text{with} \quad & q_{xc}' = \lambda_x \frac{\varepsilon^4 + \omega_x \varepsilon^2 + \rho_x}{\varepsilon^4 + \gamma \varepsilon^2 + \alpha'} q \leq q, \quad q_{yc}' = \lambda_y \frac{1 + \omega_y \varepsilon^2 + \rho_y \varepsilon^4}{\varepsilon^4 + \gamma \varepsilon^2 + \alpha'} q \leq q \end{aligned} \right\} \quad (28)$$

If we put q_{ex} and q_{ey} equal to their values for $\varepsilon=1$, values β , γ , α' , etc. are constants⁽⁷⁾. Somewhat more accurate values could be obtained, however, by taking into account the variation of q_{ex} and q_{ey} with ε . In order to avoid that by this β , γ , α' , etc. would become functions of ε , we expressed q_{ex} and q_{ey} in q_{xm} and q_{ym} , by which β , γ , α' , etc. remained constant in the intervals $\varepsilon=0.5-1$ and $\varepsilon=1-2$ ⁽⁸⁾. In table I, where cases I_u-VI_u refer to the 6 cases in fig. 4 and to uniform load, all values of eqs (27) and (28) are given.

Only for the moments along the short clamped edges it is not allowed to assume curve 1 in fig. 3d as a parabola. These clamping moments we derived as follows. M_{yc} for case II_u we found by superimposing on the deflection of a square plate, with sides l_x , for which M_{yc} is known (see also under here), a deflection of one of the clamped edges according to that of the middle strip X_m in case $\varepsilon=2$, yielding $M_{yc} = -0.057 ql_x^2$. Subsequently we found M_{yc} for case IV_u and $\varepsilon=2$ by remarking that here the X-strips, with lengths l_x , have the same rigidity as if they were clamped with lengths $l_x' = l_x \sqrt[4]{5}$, so that M_{yc} has about the same value as for case II_u and $\varepsilon = \frac{2}{\sqrt[4]{5}} = 1.34$, being

$$M_{yc} = -0.057 ql_x'^2 = -0.127 ql_x^2.$$

As, however, here $q_{ey} = 1.22 q$ instead of $1.32 q$ for case II_u, we have to multiply this value with about $2.22/2.32$, yielding $M_{yc} = -0.120 ql_x^2$. Using the carry-over factors, mentioned under here, we computed from these values M_{xc} and M_{yc} for $\varepsilon=0.5$ and 2 for the other cases (fig. 4). Demanding that $dM_c/d\varepsilon$ is continuous at $\varepsilon=1$ and zero at $\varepsilon=0.5$ and 2, we obtain for $\varepsilon < 1$ and $\varepsilon > 1$ respectively

$$M_{xc} = [-A + B(\varepsilon - 0.5)^p] ql_x^2 \quad \text{and} \quad M_{yc} = [-C + D(2 - \varepsilon)^p] ql_x^2 \quad (29)$$

⁽⁷⁾ BIJLAARD, *De Ingenieur*, n° 23, 1935.

⁽⁸⁾ BIJLAARD, *De Ingenieur in Ned. Indië*, n° 12, 1935.

in which A, B, C, D and p are given in table II. For case VI and $\varepsilon < 1$ we got

$$M_{xc} = [-0.057 - 0.06(\varepsilon - 0.5)^2 + 0.35(\varepsilon - 0.5)^5] ql_y^2. \quad (30)$$

In the same way we examined cases I and II (fig. 4) for hydrostatic load $q = xp/l_x$. As we considered both cases separately and disposed already of the data for uniform load, we could approximate the shapes of curves 1 and 3 (cf. fig. 3d), for which in case II we used curves of the fifth and seventh degree respectively, still better than before. Eqs. (27) and (28) hold here as well, the coefficients being given in table III (cases I_h and II_h), in which M_{xcu} and M_{xcl} refer to the upper ($x=0$) and lower edge ($x=l_x$). For the clamping moments at the shorter edges we got for case II_h and $\varepsilon < 1$

$$M_{xcu} = 0.002(9 - 40\varepsilon + 22\varepsilon^2)pl_y^2 \quad \text{and} \quad M_{xcl} = 0.0066(4\varepsilon - 9)pl_y^2 \quad (31)$$

whilst for $\varepsilon > 1$ the maximum clamping moment $M_{yc} = -0.028 pl_x^2$. The better approximation appears from the fact, that with the values in table III it follows from case II_h and $\varepsilon = 1$ a clamping moment for uniform load $p = q$, being the sum of M_{xcu} and M_{xcl} , the value $M_{xc} = -0.0507 ql_x^2$, whilst with our values for case II_u in table I we find directly $M_{xc} = -0.0529 ql_x^2$, the accurate value being $M_{xc} = 0.0513 ql_x^2$ ⁽⁹⁾. In the same way other cases may be examined. It is, however, easier to determine from our values for uniform load the carry-over factors c according to the Cross method of moment distribution (fig. 5). It is for example obvious that, with reference to the moments at the middles of the edges,

$$c_x = \frac{M_{xcVI} - M_{xcII}}{M_{xcII}} \quad \text{and} \quad c_{yx} = \frac{1}{2}(1 - c_x) \frac{M_{ycIV} - M_{ycII}}{M_{xcII}}.$$

In a similar way we calculated the influence values ν of an edge moment M (fig. 5) for the positive moments in the slab. Furthermore we calculated the factors with which the clamping moments at the middle of the sides have to be multiplied to get the maximum edge moments. We found for example the coefficients for case VI_h for hydrostatic load (edge $x=0$ simply supported), as given in table III, by superimposing the influence of a moment, opposite to M_{xcu} , on the moments for case II_h. We have e.g. $M_{xcIV} = M_{xcII} + c_x M_{xcuII}$. The clamping moments at the shorter sides are

$$M_{xcl} = [-0.0352(2 - \varepsilon) + 0.072(1 - \varepsilon)^2 - 0.09(1 - \varepsilon)^3]pl_y^2$$

$$\text{and} \quad M_{yc} = [-0.0367 + 0.0074(2 - \varepsilon)^4]pl_x^2. \quad (32)$$

Moreover, using the carry-over factors c , we are able to calculate continuous floor slabs, starting from case II for all plates, according to the Cross method, whereby we can also allow for the torsional rigidities of the beams. After having found the final edge moments we correct the positive moments in the slabs by means of the partial influence values ψ of the edge moments, being valid if each edge moment varies separately.

These values ψ were calculated in another way by Bittner ⁽¹⁰⁾ (his values μ). From our data for uniform and hydrostatic load we determined

⁽⁹⁾ TIMOSHENKO, *Theory of Plates and Shells*, 1940, p. 228.

⁽¹⁰⁾ BITTNER, *Momententafeln und Einflussflächen für kreuzweise bewehrte Eisenbetonplatten*, Vienne, 1938.

Case	m	n	m _c	n _c	α	ε = 1 - 2						ε = 0,5 - 1					
						β	α'	γ	λ _x	ω _x	ρ _x	β	α'	γ	λ _y	ω _y	ρ _y
I _u	1/8	1/8	—	—	1	7/6	1	2	—	—	—	7/6	1	2	—	—	—
II _u	1/24	1/24	-1/12	-1/12	1	1.21	0.91	0.86	1.18	0.27	0.22	1.32	1.09	0.94	1.30	0.27	0.22
III _u	9/128	9/128	-1/8	-1/8	1	1.20	0.94	1.33	1.20	0.37	0.24	1.29	1.07	1.42	1.28	0.37	0.24
IV _u	1/8	1/24	—	-1/12	5	1.26	5.22	3.08	—	—	—	1.43	6.19	3.34	6.88	0.22	0.07
V _u	1/8	9/128	—	-1/8	2.5	1.22	2.53	2.64	—	—	—	1.26	2.69	2.72	3.11	0.32	0.12
VI _u	9/128	1/24	-1/8	-1/12	2	1.23	1.94	1.55	1.23	0.40	0.38	1.36	2.29	1.68	2.66	0.25	0.14

TABLE I

Case	A	B	C	D	p
II _u	0.057	0.25	0.057	0.004/ε ⁶	6
III _u	0.08	0.19	0.08	0.006/ε ⁵	5
IV _u	—	—	0.12	0.05	2
V _u	—	—	0.12	0.033	3
VI _u	—	—	0.08	0.018	4

TABLE II

Case	m	n	m _c	n _c	ε = 1 - 2									
					β	β _α	α'	γ	λ _{xu}	ω _{xu}	ρ _{xu}	λ _{xl}	ω _{xl}	ρ _{xl}
I _h	1/8	1/8	—	—	0.62	0.52	0.78	1.76	—	—	—	—	—	—
II _h	1/24	1/24	-1/12	-1/12	0.62	0.58	0.84	0.82	0.50	0.15	0.01	0.71	0.25	0.21
VI _h	9/128	1/24	-1/8	-1/12	0.47	0.94	1.92	0.80	—	—	—	0.64	0.04	0.60

Case	ε = 0.5 - 1							Φ ₁ = 2ε ² - 4ε + 3	Φ ₂ = 2ε ² - 4ε + 7	Φ ₃ = 18ε ² - 36ε + 23
	β	β _α	α'	γ	λ _y	ω _y	ρ _y			
I _h	0.62 Φ ₁	0.52	0.78	1.76	—	—	—	Φ ₁ = 2ε ² - 4ε + 3	Φ ₂ = 2ε ² - 4ε + 7	Φ ₃ = 18ε ² - 36ε + 23
II _h	0.67 Φ ₁	0.126 Φ ₂	0.97	0.88	0.124 Φ ₂	0.28	0.23			
VI _h	0.09 Φ ₃	0.18 Φ ₂	1.42	1.14	0.175 Φ ₂	0.31	0.12			

TABLE III

- M _{yc}	Timoshenko			Bijlaard			Multiplier
Case	II _u	IV _u	V _u	II _u	IV _u	V _u	
ε = 0.5	0.083	0.084	0.122	0.083	0.083	0.123	ql _y ²
ε = 1	0.051	0.070	0.084	0.053	0.070	0.087	ql _y ²
ε = 2	0.057	0.119	0.122	0.057	0.120	0.120	ql _x ²

TABLE IV

values ω and φ according to Bittner too for values $\varepsilon = 0.5 - 2$. It is evident that for uniform load e.g. $\omega_y = -M_{ycv}$ and that $\varphi_y = \frac{M_{ycv} - M_{ycIV}}{M_{ycIV}}$, so that, in cases where this is easier, we can calculate a slab in this way too ⁽¹¹⁾.

In table IV we compared the clamping moments M_{yc} according to our formulae with those according to Timoshenko ⁽¹²⁾ for cases II_u, IV_u and V_u and $\varepsilon = 0.5, 1$ and 2 .

Résumé

Par une méthode approximative nous obtenons des formules simples et générales nous permettant de déterminer, avec une approximation suffisante, les moments fléchissants maxima positifs et négatifs. Ces moments ainsi déterminés, nous pouvons calculer les coefficients de transmission utilisés pour le calcul des dalles continues selon la méthode de Cross.

Zusammenfassung

Durch ein Näherungsverfahren werden für die grössten positiven und negativen Biegemomente einfache allgemeine Formeln von genügender Genauigkeit erhalten. Mit den so berechneten Werten können die Uebertragungskoeffizienten bestimmt werden, die es erlauben, durchlaufende Platten auch nach dem Momentenverteilungsverfahren von Cross zu berechnen.

Summary

By an approximative method simple general formulae have been obtained for the maximum positive and negative bending moments, which give more than sufficiently accurate results. From the data obtained in this way the carry-over factors were calculated, by which the bending moments in continuous floors may also be computed by the Cross method of moment distribution.

⁽¹¹⁾ These values ω_y and φ_y have nothing to do with our values ω_y , φ_y , etc.

⁽¹²⁾ TIMOSHENKO, *Theory of Plates and Shells*, 1940, pp. 228, 206 and 213 resp.

Leere Seite
Blank page
Page vide