

Strength of columns under biaxially eccentric loads

Autor(en): **Okada, Kiyoshi / Kojima, Takayuki / Hirasawa, Ikuo**

Objekttyp: **Article**

Zeitschrift: **IABSE reports of the working commissions = Rapports des commissions de travail AIPC = IVBH Berichte der Arbeitskommissionen**

Band (Jahr): **16 (1974)**

PDF erstellt am: **25.04.2024**

Persistenter Link: <https://doi.org/10.5169/seals-15731>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

Strength of Columns under Biaxially Eccentric Loads

Résistance des colonnes soumises à des charges excentrées biaxiales

Tragfähigkeit von Stützen unter zweiachsig exzentrischer Belastung

Kiyoshi OKADA

Professor

Kyoto University

Takayuki KOJIMA

Assistant Professor

Ritsumeikan University
Japan

Ikuo HIRASAWA

Lecturer

Chubu Institute of Technology

I Introduction

In the ultimate strength design of the columns, it is quite important to examine not only the ultimate strength but the ultimate deflection at the same time, especially, for the slender columns under biaxially eccentric loads.

Computer analysis¹⁾ are made on: (1) the failure envelope of column cross-section and (2) the column deflection under biaxially eccentric load. The strength and the deflection at ultimate stage can be predicted by combining these two methods. This analysis, differently from those ever proposed, has characteristics of dealing with the change of the location of the eccentricity under biaxially eccentric load.

Based on the analysis and results of tests, the simple design procedure for slender column is proposed.

II Test of the columns under biaxially eccentric loads

Totally sixty-two short and slender columns are made and tested¹⁾, and the test programs for slender column are shown in Table 1.

All of the slender columns have the same rectangular cross-section of 6x9 cm and the same initial eccentricity of 3 cm. Columns of series A and B were reinforced with four and six dia. 6 mm bars, respectively. The column lengths of each group in two series were 60, 120 and 180 cm, respectively. Initial directions of eccentricities in a group were I, III and V or I, II, III, IV and V as shown in the remark in Table 1.

Fig. 1 shows the comparison of the measured deflections with the computed ones. The stress-strain relationship of concrete as assumed in the calculation is also shown in Fig. 1.

Fig. 2 clearly shows the change of eccentricities with increasing load from the initial to the final locations, the final eccentricities being not located along the inclination of initial direction. These figures show that the analysis coincide well with the results of tests.

The torsional deformation due to biaxially eccentric load is not considered here, but it should be studied as an important problem in future.

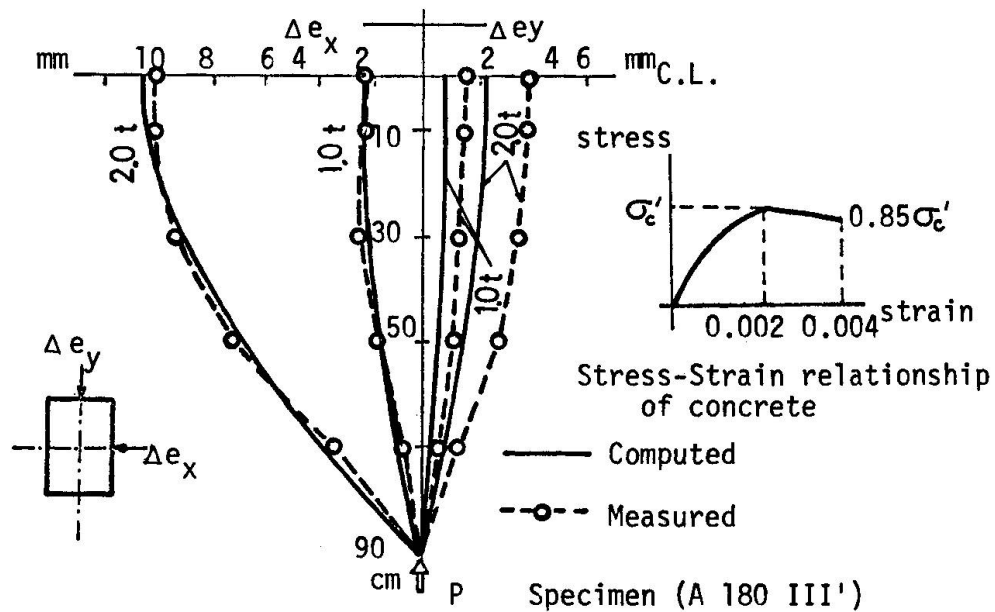


Fig. 1 Comparison of the measured deflections with the computed ones

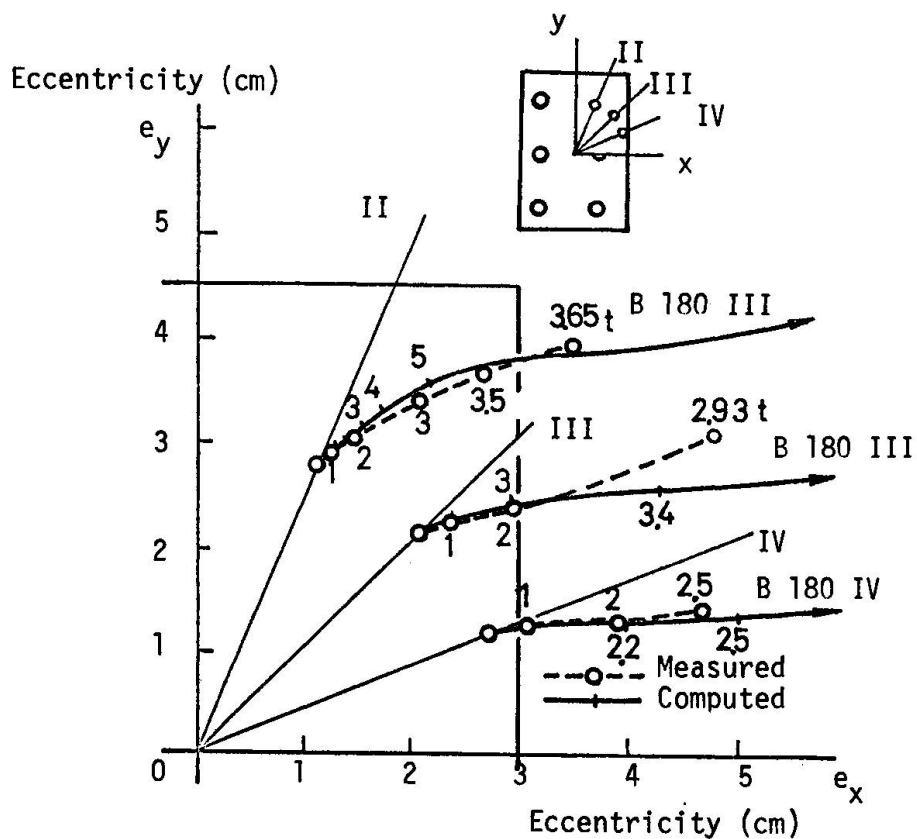
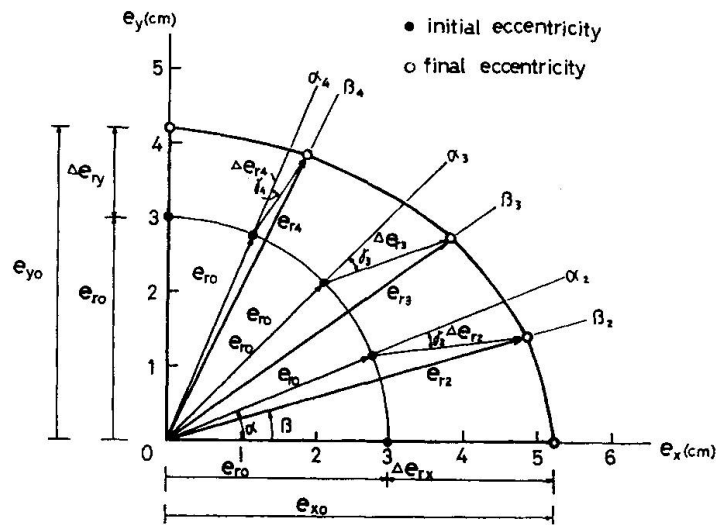
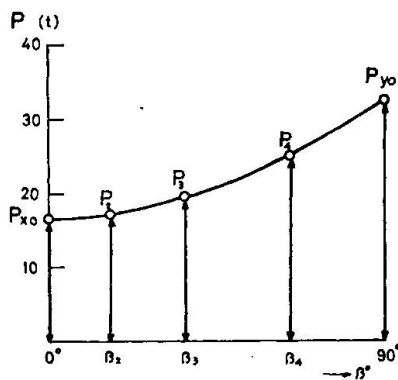
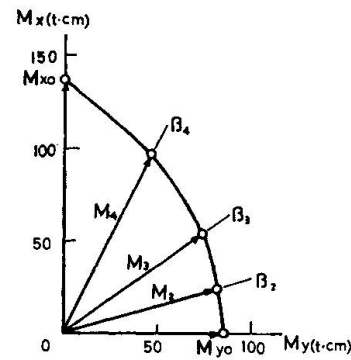


Fig. 2 Load-eccentricity relationships in the mid-height section of column

Fig. 4(a) Initial and final eccentricities projected on the e_x - e_y planeFig. 4(b) P - β relationshipFig. 4(c) Radial ultimate moments
on final direction of eccentricity

(2) Modified additional moment method

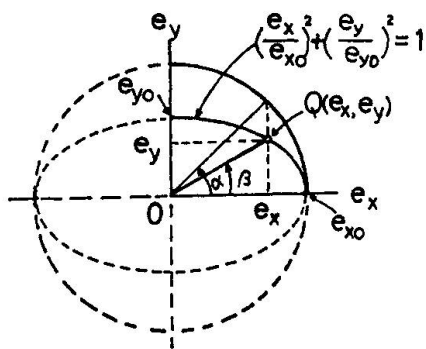


Fig. 5

Supposed radial eccentricity

Detailed calculations as illustrated in II are rather complicated, so the simple design procedure is proposed here.

It may be deduced that the radial eccentricity $Q(e_x, e_y)$ at the final stage can be approximated by the following equation, as shown in Fig. 5;

$$\left(\frac{e_x}{e_{x0}}\right)^2 + \left(\frac{e_y}{e_{y0}}\right)^2 = 1 \quad (1)$$

The eccentricity e_x , or e_y is given by

$$e_x = e_{x0} \cos \alpha$$

$$e_y = e_{y0} \sin \alpha$$

where:

- α and β in Fig. 5 are the inclinations of the lines joining the initial and final loading points (eccentricities) to the centroid of the column cross-section, respectively, and
- e_{x0} and e_{y0} are the final values of uniaxial eccentricity along x and y axis, respectively.

Actual radial eccentricity at the ultimate stage is given by eq. (2):

$$e_r = \sqrt{e_x^2 + e_y^2} \quad (2)$$

and the relation between α and β is given as follows:

$$\beta = \tan^{-1} \left(\frac{e_{y0}}{e_{x0}} \cdot \tan \alpha \right) \quad (3)$$

Next, it may also be assumed that the outer limits of the ultimate moment corresponding to Fig. 5 is approximately given by the expression as shown in Fig. 6.

$$M_x = M_{x0} \sqrt{1 - \frac{M_y}{M_{y0}}} \quad (4)$$

where M_{y0} and M_{x0} are the equivalent uniaxial moments for the ultimate moment about x- and y-axis, respectively, and M_y and M_x are the components of the actual ultimate radial moment M_r .

Equation(4) gives the following relations,

$$M_y = M_r \cos \beta \quad (5)$$

$$M_x = M_r \sin \beta \quad (6)$$

$$M_r = \frac{M_{x0}}{A \sin \beta} [\sqrt{A+1} - 1] \quad (7)$$

$$\text{where } A = 2 \frac{M_{y0}}{M_{x0}} \tan \beta. \quad (8)$$

Thus, from equations (2) and (7), the ultimate load P_r under biaxially eccentric load can be given by

$$P = \frac{M_r}{e_r}. \quad (9)$$

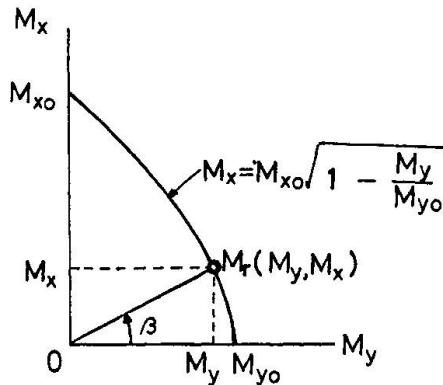


Fig. 6 Approximation for radial ultimate moment

(3) Comparison with tests

The detailed comparison of the proposed simple design procedures with the results of tests on actual five columns are shown, for example, in Fig. 7(a), (b) and (c), concerning the ultimate deflection (e_r), the ultimate load (P_r) and the ultimate moment (M_r), respectively.

For general use, when the uniaxial ultimate deflection and load calculated by the additional moment method introduced by Prof. Macgregor in the Preliminary Report Theme II (B.S. or FIP-CEB recommendation) are inserted into the above equations, the authors' method agrees well with the results of tests as shown in Table 1.

Then, the simple solution proposed here for the ultimate capacities of the slender columns subjected to biaxially eccentric load may be used for design purpose.

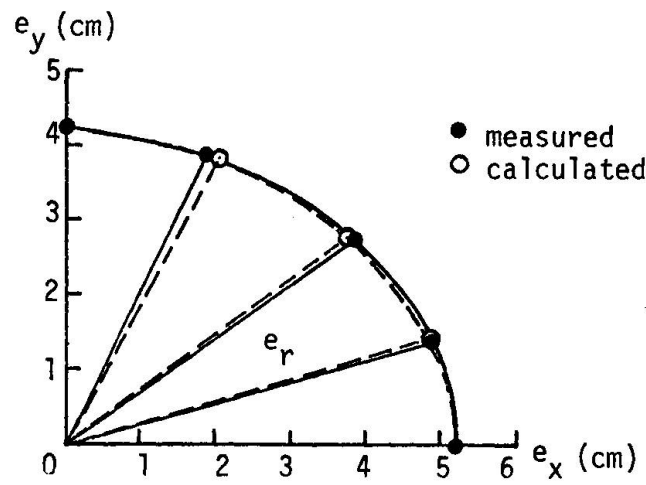
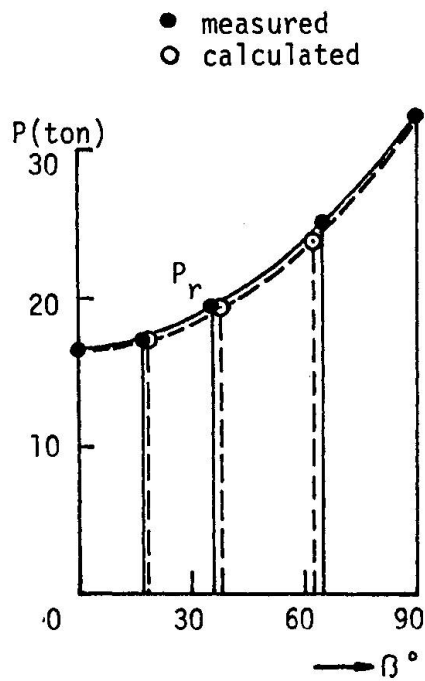
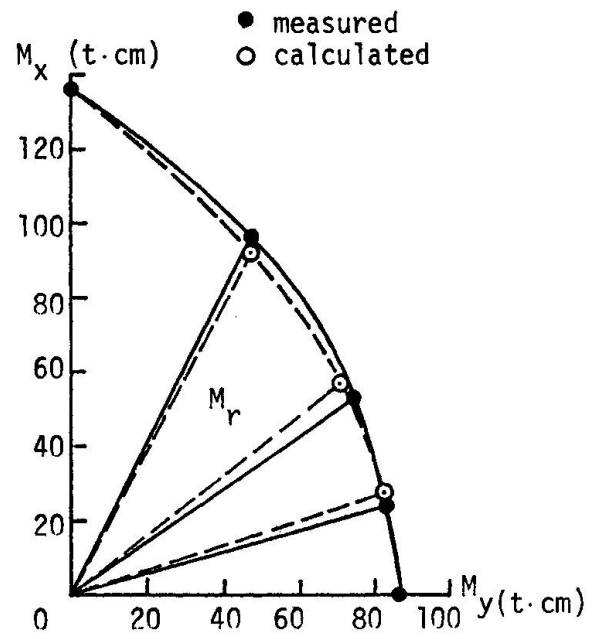


Fig. 7(a) Comparison for e_r Fig. 7(b) Comparison for P_r Fig. 7(c) Comparison for M_r

Table 1. Comparison between test results with calculated results

Column	l cm	b cm	h cm	d/h	σ_c' kg/cm ²	σ_{sy} kg/cm ²	e_{r0} cm	$e_{r\text{test}}$ cm	$e_{r\text{cal}}$ cm	$\frac{e_{r\text{test}}}{e_{r\text{cal}}}$	$p_{r\text{test}}$ ton	$p_{r\text{cal}}$ ton	$\frac{p_{r\text{test}}}{p_{r\text{cal}}}$	Remark
A 60 I III V	60	6	9	0.833	296	3430	3	3.30 3.30 3.47	3.16 3.22 3.29	1.044 1.025 1.055	7.75 5.35 3.95	8.59 4.36 3.54	0.902 1.227 1.116	 III = 45°
A 120 I III V	120	6	9	0.833	296	3430	3	4.20 4.50 4.17	3.65 3.88 4.10	1.151 1.160 1.017	7.40 3.65 2.68	7.96 3.10 2.37	0.930 1.178 1.131	
A 180 I III V	180	6	9	0.833	296	3430	3	5.46 5.12 5.42	4.57 4.99 5.37	1.195 1.026 1.010	6.00 2.45 2.09	7.02 2.11 1.56	0.855 1.161 1.340	
B 60 I II III IV V	60	6	9	0.833	318	3430	3	3.35 3.23 3.27 3.50 3.59	3.16 3.18 3.22 3.27 3.28	1.060 1.016 1.016 1.070 1.095	8.87 5.40 4.66 4.40 4.69	9.06 6.97 5.97 5.51 5.39	0.979 0.775 0.781 0.799 0.870	 II = 22.5° III = 45° IV = 67.5°
B 120 I II III IV V	120	6	9	0.833	293	3430	3	4.34 4.48 4.50 4.35 4.01	3.66 3.73 3.89 4.04 4.10	1.186 1.201 1.157 1.077 0.978	6.20 4.33 4.16 3.35 3.00	8.02 5.52 4.30 3.72 3.55	0.773 0.784 0.967 0.901 0.845	
B 180 I II III IV V	180	6	9	0.833	318	3430	3	5.11 5.22 5.45 6.45 6.25	4.58 4.70 4.97 5.24 5.34	1.116 1.111 1.097 1.231 1.170	5.05 3.65 2.93 2.90 2.73	7.28 4.33 3.06 2.52 2.37	0.694 0.843 0.958 1.151 1.152	
A 60 A 120 A 180	60 120 180	6	9	0.833	333	3430	3	3.25 4.16 5.55	3.22 3.87 4.96	1.010 1.075 1.119	4.28 4.10 2.44	4.50 3.18 2.16	0.951 1.289 1.130	
B 60 B 120 B 180	60 120 180	6	9	0.833	333	3430	3	3.38 4.25 5.55	3.22 3.88 4.96	1.050 1.095 1.119	4.75 4.40 3.00	6.05 4.44 3.09	0.785 0.991 0.971	
Average										1.091			0.974	

IV Conclusions

A calculating method of the ultimate capacity of concrete columns with taking into consideration the column deflection under biaxially eccentric loads is proposed.

A simple design procedure is also proposed which is developed and refined so as to achieve both simplicity in use and, as far as possible, a realistic representation of actual behavior.

This method agrees well with the results of thirty model columns.

Reference

- 1) OKADA, K. and HIRASAWA, I., "Ultimate Strength of Square and Rectangular Columns under Biaxially Eccentric Loads", Review of the Twenty-third General Meeting, The Cement Association of Japan, May 1969, pp356-361.

SUMMARY

This paper deals with the design method for reinforced concrete slender columns subjected to biaxially eccentric loads. Firstly, the analysis of strength and deflection of slender column at ultimate stage is made using computer, the results are compared with the results of tests.

Next, taking into account the analysis, a simple design solution is proposed. This method agrees with tests and shows applicable for general use.

RESUME

Ce rapport présente une méthode de dimensionnement pour les colonnes en béton armé élancées soumises à des charges avec excentricité biaxiale. On procède d'abord au calcul de la résistance et de la déformation ultimes des colonnes élancées en utilisant l'ordinateur; les résultats sont comparés avec ceux des essais.

On propose ensuite, en se basant sur les calculs, une méthode simple de dimensionnement. Cette méthode concorde bien avec les résultats expérimentaux; elle est applicable dans la pratique.

ZUSAMMENFASSUNG

Der Beitrag behandelt die Bemessung von schlanken Stahlbetonstützen unter zweiachsig exzentrischer Belastung. Zunächst werden die Berechnung der Traglast und der zugehörigen Verformungen schlanker Stützen mittels Computer durchgeführt und die Ergebnisse mit Versuchsergebnissen verglichen.

Als nächstes wird, unter Berücksichtigung der genauen Berechnung, eine einfache Bemessungsmethode vorgeschlagen. Diese Methode führt zu Ergebnissen, die gut mit Versuchen übereinstimmen und zeigt sich als allgemein anwendbar.