

Seismic response of partially earth-anchored cable-stayed bridge

Autor(en): **Sugiyama, Toshiyuki**

Objektyp: **Article**

Zeitschrift: **IABSE reports = Rapports AIPC = IVBH Berichte**

Band (Jahr): **82 (1999)**

PDF erstellt am: **23.09.2024**

Persistenter Link: <https://doi.org/10.5169/seals-62125>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.



Seismic Response of Partially Earth-anchored Cable-stayed Bridge

Toshiyuki SUGIYAMA
Associate Professor
Yamanashi University
Takeda, Kofu, Japan



Toshiyuki
Sugiyama, born
1954 received his
Dr. Eng. degree
from Univ.
Tokyo 1984

Abstract

When cable-stayed bridge is applied to long span bridge with main span length of about 1000 meters, large axial force acting on the main girder probably becomes a serious problem because it may cause the buckling of main girder. To reduce this axial force, partially earth-anchored cable-stayed bridge has been proposed by Gimsing as shown in Fig. 1. And a few studies have been carried out to discuss the static characteristics of this type of bridge. However, the seismic characteristics of partially earth-anchored cable-stayed bridges have not been estimated in detail. The purpose of this paper is to investigate the dynamic characteristics of partially earth-anchored cable-stayed bridge subjected to strong earthquake motion based on the results of time-history response analysis. The bridge type is three spans continuous girder type with multiple cables and its main span length is 1000 meters as shown in Fig. 2. Finite Element Method is applied to the dynamic analysis. Hyogo-ken Nanbu Earthquake (Kobe Earthquake) record including both horizontal and vertical components is adopted as input earthquake motion. Only the direction of motion parallel to the bridge axis is considered. Soil-structure interaction and phase-lag of input earthquake motion that arises among two piers and two anchored points of side-span cables are neglected here.

It has been revealed from Fig. 3 that the maximum vertical displacement at the center of main span of partially earth-anchored cable-stayed bridge caused by strong earthquake is enough smaller than the deformation limit although the maximum deformation of partially earth-anchored cable-stayed type is larger than that of self-anchored one.

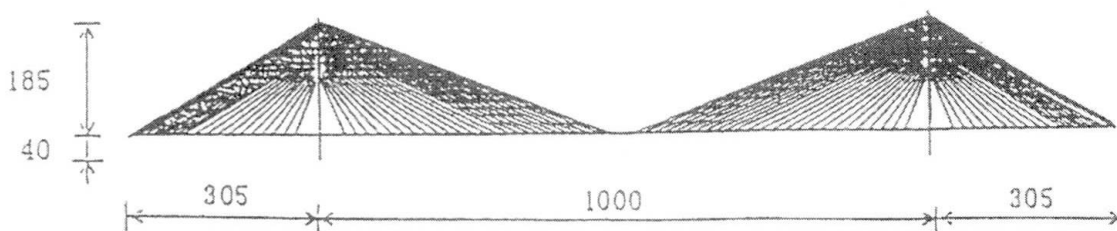


Fig. 1 Schematic diagram of Partially earth-anchored cable-stayed bridge

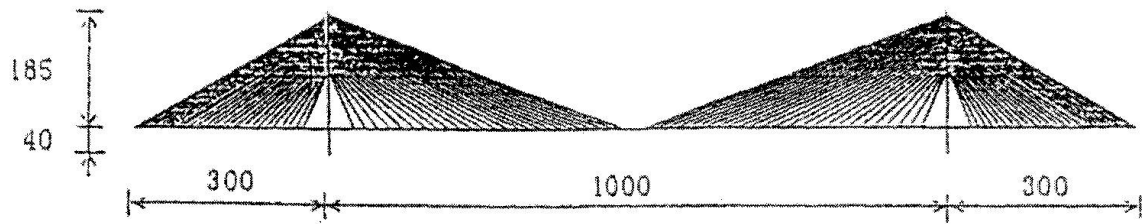


Fig. 2 Partially earth-anchored cable-stayed bridge analyzed in this study

The results also show that the stress resultants of partially earth-anchored cable-stayed bridge are considerably smaller than those of self-anchored one as indicated in Fig. 4. These results indicate that no problem may occur from seismic viewpoint in case of the application of partially earth-anchored cable-stayed bridge to long span bridge with main span length of about 1000 meters. And it is also cleared that the consideration of only horizontal earthquake motion is sufficient in case of the execution of dynamic response analysis of cable-stayed bridge with 1000m main span length.

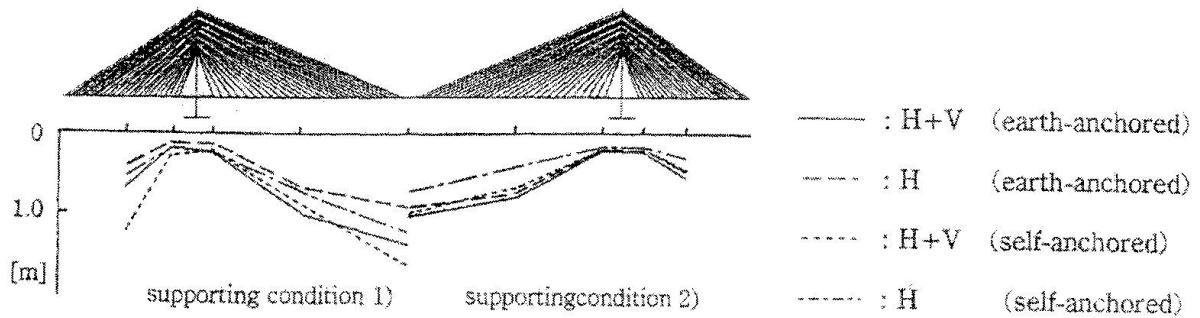


Fig. 3 Maximum vertical displacement of main girder

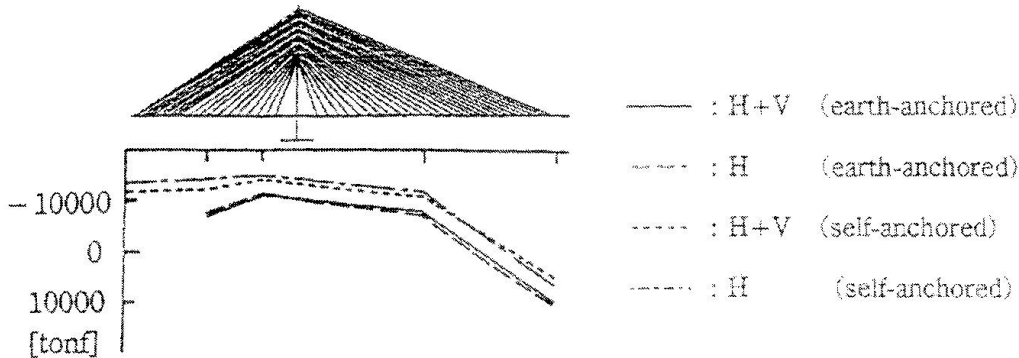


Fig. 4 Axial force of main girder