

Cable damper of Meiko-Nishi Cable-Stayed Bridge

Autor(en): **Iioka, Yutaka / Takahashi, Michio / Kajita, Nobukazu**

Objekttyp: **Article**

Zeitschrift: **IABSE congress report = Rapport du congrès AIPC = IVBH Kongressbericht**

Band (Jahr): **12 (1984)**

PDF erstellt am: **15.05.2024**

Persistenter Link: <https://doi.org/10.5169/seals-12301>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.



Cable Damper of Meiko-Nishi Cable-Stayed Bridge

Yutaka IIOKA

Nihon Doro Kodan
Nagoya, Japan

Michio TAKAHASHI

Nihon Doro Kodan
Hiroshima, Japan

Nobukazu KAJITA

Shin-Nippon-Giken Eng.
Tokyo, Japan

I

1. GENERAL

Meiko-Nishi Bridge, which is under construction in Nagoya Harbor, Japan, is a steel cable-stayed bridge with three spans of (175+405+175m). The box-girder type with an orthotropic deck is a trapezoidal 3-cell box-sections with the depth of 2.8 m. Pylons are A-frame fixed to piers. The longitudinal cable configuration is the fan type of twelve stay cables. This bridge was closed on July 16, 1984, and will be completed on April, 1985.

2. EARTHQUAKE RESISTANCE DESIGN

The construction site which is located in the strong seismic zone is in rather poor geotechnical condition. In the earthquake resistance design, following earthquakes are considered. The one is expected to occur 2~3 times for 100 years with $M=8.0$ for the epicentral distance of 100 km, and the other is expected to occur 4~5 times with $M=7.0$ for the epicentral distance of 50 km, in which M is the magnitude. Therefore, the design of pylons and substructures needs special considerations to the longitudinal earthquake force. The degree of horizontal connection between pylon and girder is one of the most important influence factors against the earthquake response, because of the large mass of the stiffened girders. Meiko-Nishi Bridge has been installed horizontal cables, called cable dampers, in the connection of pylon and girder to reduce the horizontal forces to the pylon from the stiffened girders. The earthquake force will be reduced, because the cable dampers give lower natural frequency and larger system damping to the structure.

3. DIMENSION OF CABLE DAMPER

Material	2 bundles of 61 galvanized 7-wire strands	
Length (L)	43.2m	
Area (A)	$62.6 \text{ cm}^2 \times 2 = 125.2 \text{ cm}^2$	
Modulus of Elasticity (E)	$1.9 \times 10^7 \text{ t/m}^2$	
EA/L	$5.5 \times 10^3 \text{ t/m}$	
Prestretching	Center Span	440 t
	Side Span	415 t


CABLE DAMPER OF MEIKO-NISHI CABLE STAYED BRIDGE

Meiko-Nishi Bridge, which is under construction in Nagoya Harbor, Japan, is a steel cable-stayed bridge with three spans of (175 + 405 + 175m). The box-girder type with an orthotropic deck is a trapezoidal 3-cell box-sections with the depth of 2.8m. Pylons are A-frame fixed to piers. The longitudinal cable configuration is the fan type of twelve stay cables.


Meiko-Nishi Bridge has been installed horizontal cables (2 bundles of 61 galvanized 7-wire strands) with the length of 43.2 m, called cable dampers, in the connection of pylon and girder to reduce the horizontal forces to the pylon from the stiffened girders. The earthquake force will be reduced, because the cable dampers give lower natural frequency and larger system damping to the structure.




A-frame towers, the height of 104 m and the weight of 1250 ton, were hoisted into place by a 3000-ton floating crane in July, 1983.

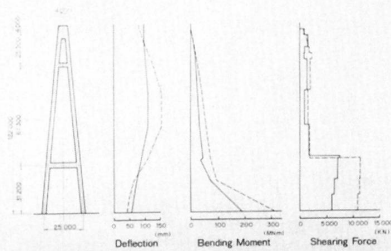

PYLON





GENERAL VIEW



GIRDER

DYNAMIC RESPONSES OF THE BRIDGE SYSTEM CONNECTED BETWEEN PYLON AND GIRDER BY CABLE DAMPER AND BY HINGED SUPPORT



SECTION OF CABLE DAMPER

DESIGN CONDITION OF CABLE DAMPER

Area	62.58 cm ²
Length	43.2 m
Design Load	295.7 kN
Ultimate Load	1066.6 kN
Temperature	20°C
Earthquake	1066.6 kN