

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 79 (1998)  
  
**Artikel:** Strength optimisation and crack resistance of RC structures  
**Autor:** Pochtmann, Yuriy M.  
**DOI:** <https://doi.org/10.5169/seals-59993>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 11.07.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Strength Optimisation and Crack Resistance of RC Structures

**Yuriy M. POCHTMANN**

Prof.

Dnepropetrovsk State Univ.  
Dnepropetrovsk, Ukraine



Yuriy M. Pochtman, born 1934, Dr  
Sc, Prof. of Dept of Applied  
Mathematics and Mechanics,  
Dnepropetrovsk State University.  
Member of New York Academy of  
Sciences and IABSE.

### Summary.

The calculation of strength for reinforced concrete members is at present executed pursuant to requirements [1], where for efforts each of combinations in sections, in view of position of the section relatively to longitudinal axis of member (normal, inclined, spatial) the appropriate formulas for calculation of strength are adduced. The aid [2], made in development of [1], contains the auxiliary tables oriented on «hand-operated» calculations. However such approach is badly combined with opportunities of computer simulation.

### 1. Optimum Formulation

At the same time, all problems of calculation of strength, submitted in [1] and [2] have sufficient generality, as follows: in each of them, at given efforts, overall dimensions of section, classes of concrete and reinforcement, it is necessary to find the minimum area of reinforcement at which the conditions of strength, as well as parametrical and structural restrictions, intended in [1], are provided. Such formulation of the problem of calculation of strength quite corresponds to the problem of nonlinear mathematical programming (NMP), as it represented, for example, in [3]:

$$\min \{ F(\bar{x}) | g_i(\bar{x}) \geq 0, i = 1, \dots, q; h_j(\bar{x}) = 0, j = 1, \dots, P \}. \quad (1)$$

Here:  $\bar{x} = x_i(1, \dots, n)$  -  $n$ -dimensional the vector of unknown variables;  $\Phi(\bar{x})$  - scalar, in general case - nonlinear functions of all several variables  $x_i$ ;  $g_i(\bar{x})$ ,  $h_j(\bar{x})$  - scalar, in general case - nonlinear functions of all or some variables forming system of restrictions, correspondingly, in form of unequations and equations.

It is important to note that formalization of wide class of strength problems in form of optimization model [1] permits during the construction of appropriate computing algorithms to use enough general dependencies which describes stress-strained state of reinforcement and concrete in section, without additional simplifications, stipulated by the limited opportunities of «hand-operated» calculation.

This article enters the improved diagram of dependence of stress in longitudinal reinforcement  $\sigma_s$  from the relative depth of compressed zone of concrete  $\xi$  for bending and eccentric com-



pressed members from concrete having class B30 and below, with reinforcement of class A-I, A-II, A-III (see fig.1, curve 1). The stress  $\sigma$  are described by not direct but broken line in segment  $\xi \in [\xi_R, 1]$  with point of inflection in  $\{\}$  in contrast to known simplified diagram, adduced in [4] and used in [1]. By this it is provided the better coincidence with exact formula of stress [4].

Here:  $\bar{\sigma} = \frac{\sigma_s}{R}$  - reduced stress in reinforcement placed at extended or less compressed edge of member.

Beside it is used a single expression for determination of stresses in longitudinal reinforcement

$$\sigma_s = R_s \cdot F(\xi), \xi \in [0, 1.1] \quad (2)$$

where  $F(\xi)$  - function, approximated the considered diagram. The interpolation polinom of 6-th degree is applied as such function.

$$F(\xi) = a_0 + \sum_{i=1}^6 a_i \xi^i \quad (3)$$

Values of coefficients  $a_i$  ( $i = 0, \dots, 6$ ) for classes of concrete B12,5 and B15 by  $\gamma_{B2} = 0,9$  are calculated on computer and listed in table.

Table.

$a_i$	Class of Concrete	
	B12.5	B15
$a_0$	0.987019	0.987970
$a_1$	3.036522	2.868721
$a_2$	-36.030163	-34.394078
$a_3$	140.012541	135.665211
$a_4$	-224.673126	-222.200063
$a_5$	149.077017	151.287490
$a_6$	-33.430986	-35.232187

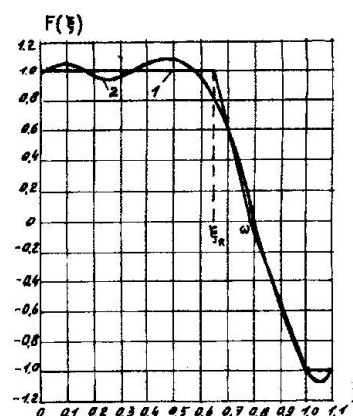


fig 1.

The diagram  $F(\xi)$ , having been received for concrete B15, is represented on fig.1 (curve 2).

Let's consider some problems of calculations of reinforced concrete members formulating as a problem of NMP using dependencies (2) and (3). All the designations, except of specially mentioned, are accepted from [2].

## 2. The strength calculation for normal sections of bended members

The relative depth of compressed zone of concrete, as well as tensioned and compressed areas of reinforcement are accepted as unknown variables of the NMP problem:

$x_1 \equiv \xi, x_2 \equiv A_s, x_3 \equiv A'_s$ . The NMP problem accepts the following air:

Find the minimum of object-function:

$$\min \Phi(x) = x_2 + x_3 \quad (4)$$

by executing of:

a) conditions of strength

$$x_1(1 - 0.5x_1) + \frac{x_3 R_s (h_0 - a')}{R_B b h_0^2} - \frac{M}{R_B b h_0^2} \geq 0 \quad (5)$$

b) equation of balance

$$\frac{\left( x_2 \left( a_0 + \sum_{i=1}^6 a_i x_1^i \right) - x_3 \right)}{x_1} - \frac{R_B b h_0}{R_s} = 0 \quad (6)$$

c) parametrical and structure restrictions

$$\left. \begin{array}{l} x_1 > 0, \\ x_1 < 1.1, \\ x_2 - 0.0005 b h_0 \geq 0, \\ x_3 \geq 0. \end{array} \right\} \quad (7)$$

Solutions of problem (4)-(7) is illustrated by control examples taken from [2].

The example 1:  $b=30\text{cm}$ ;  $h=80\text{cm}$ ;  $a=5\text{cm}$ ;  $a'=3\text{cm}$ ; concrete B15 ( $\gamma_{B2} = 0.9$ ); reinforcement AIII;  $M=20.0$  toneforce  $\cdot$  m. The results (the correspondenced values from [2] are indicated in brackets):

$$x_1 \equiv \xi = 0.323(0.322); x_2 \equiv A_s = 11.36(11.34)\text{cm}^2$$

The example 2:  $b=30\text{cm}$ ;  $h=80\text{cm}$ ;  $a=5\text{cm}$ ;  $a'=3\text{cm}$ ; concrete B15 ( $\gamma_{B2} = 0.9$ ); reinforcement AIII;  $M=80.0$  toneforce  $\cdot$  m. The results :

$$x_1 \equiv \xi = 0.538(0.550); x_2 \equiv A_s = 35.96(35.91)\text{cm}^2; x_3 \equiv A'_s = 10.62(10.00)\text{cm}^2.$$

### 3. The strength calculation for eccentric stressed members

Unknown variables of the NMP problem are accepted as in previous example:

$$x_1 \equiv \xi; x_2 \equiv A_s; x_3 \equiv A'_s.$$

The object-function has a previous air and conditions of strength is presented as:

$$\frac{2(R_B b h_0^2 x_1 (1 - 0.5x_1) + R_s (h_0 - a') \cdot x_3)(K_1 + K_2 (x_2 + x_3) - N)}{2e_0 (K_1 + K_2 (x_2 + x_3)) + (h_0 - a')(K_1 + K_2 (x_2 + x_3) - N)} \geq N \quad (8)$$

Here :

$$K_1 = \frac{1.6 E_B b h}{3 \left( \frac{l_0}{h} \right)^2 \varphi_1} \left( \frac{0.11}{0.1 + \delta_e} + 0.1 \right),$$



$$K_2 = \frac{1.6E_s}{\left(\frac{l_0}{h}\right)^2} \left(\frac{h_0 - a'}{h}\right)^2,$$

Then the equation of balance is:

$$\left(x_2 \left(a_0 + \sum_1^6 a_i x_i\right) - x_3\right) + \frac{N}{R_s x_1} - \frac{R_B b h_0}{R_s} = 0 \quad (9)$$

Parametrical and structure restrictions are recorded as

$$\left. \begin{array}{l} x_1 > 0, \\ x_1 \leq 1.1, \\ x_2 - 0.0005 b h_0 \geq 0, \\ x_3 - 0.0005 b h_0 \geq 0. \end{array} \right\} \quad (10)$$

It is accepted that in case of symmetric reinforcement  $x_2 = x_3$  in problem (4),(8)-(10).

The example 3:  $b=40\text{cm}$ ;  $h=60\text{cm}$ ;  $a=a'=4\text{cm}$ ; concrete B25

( $\gamma_{B2} = 0.9$ );  $l_0 = 6.0\text{m}$ ;  $N_1 = 70.0\text{tonforce}$ ;  $E_B = 275000\text{kgforce} / \text{cm}^2$ ; reinforcement AIII;

$M_1 = 21.3\text{toneforce} \cdot \text{m}$ . The results (value from [2] are in brackets):

$x_1 \equiv \xi = 0.235(0.235)$ ;  $x_2 = x_3 \equiv A_s = 6.51(7.6)\text{cm}^2$ ;

#### 4. The strength calculation of inclined sections of bended members

The length of projection of inclined crack  $C_0 \equiv x_1$ , the length of projection of inclined section  $C \equiv x_2$  and the area of cross reinforcement within the limits of inclined crack, referred to space of cross bars  $\frac{A_{sw}}{S} \equiv x_3$  are accepted as unknown variables of the NMP problem.

The NMP problem has the following air:

The object-function:

$$\min \Phi = x_1 \cdot x_3 \quad (11)$$

condition of strength:

$$\frac{(1 + \varphi_f) \varphi_{B2} R_{Bt} b h_0^2}{x^2} + R_{sw} \cdot x_1 x_3 + q_1 \cdot x_2 - Q_{\max} \geq 0 \quad (12)$$

restriction on maximal value of  $Q_B \leq Q_B^{\max}$ :

$$x_2 - \frac{\varphi_{B2} h_0}{2.5} \geq 0 \quad (13)$$

restriction on minimum value of  $Q_B \geq Q_B^{\min}$ :

$$x_2 - \frac{\varphi_{B2} h_0}{\varphi_{B3}} \leq 0 \quad (14)$$

restriction on minimum of web reinforcement:

$$x_3 - \frac{(1 + \varphi_f) \varphi_{B3} R_{Bt} b}{2 R_{sw}} \geq 0 \quad (15)$$

restrictions on value of  $C_0$ :

$$x_2 - x_1 > 0 \quad (16)$$

$$x_1 - \frac{\varphi_{B2} h_0}{2.5} \geq 0 \quad (17)$$

$$x_1 - 2h_0 \leq 0 \quad (18)$$

and, at least, condition of equality  $Q_B = Q_S$ :

$$\frac{x_1^2 x_3 - (1 + \varphi_f) \varphi_{B2} R_{Bt} b h_0^2}{R_{sw}} = 0 \quad (19)$$

The example 4:  $b=20\text{cm}$ ;  $h=40\text{cm}$ ;  $a=3\text{cm}$ ; concrete B15;  
( $\gamma_{B2} = 0,9$ ); cross reinforcement A-I;

$Q_{\max} = 13.75 \text{ tonforce}$ ;

$q_1 = 3.2 \text{ tonforce / m}$ .

The results (value from [2] are in brackets):

$x_1 \equiv C_0 = 45.2(44.8)\text{cm}^2$ ;  $x_2 \equiv C = 107(108)\text{cm}$ ;

$x_3 \equiv A_{sw} / S = 0.07(0.07)\text{cm}^2 / \text{cm}$ .

## Conclusions

As is obviously, the results of solution of examples 1-4 having been received approach, have good coincidence with results from [2].

The all numerical experiments were conducted by computer IBM PC in environment of programming «EUREKA» [5] and have shown the high efficiency of offered approach. By this, the possibility and expediency of unification of calculation problems of strength for reinforced concrete members by reducing them to corresponding problems of NMP. Such approach can be fruitful also for the problems of calculation of strength in which the new physical models of reinforced concrete with plenty of unknown parameters are used and for which the «hand-operated» calculations are highly difficult. The new method of calculation of strength for reinforced concrete structures under the action of cross forces, offered in [6], can serve as example of such problem.



## References

- [1] SNiP 2.02.01-84. Concrete and reinforced concrete structures [in Russian], TsITP, Moscow, 1985.
- [2] Aid to the design of concrete and reinforced concrete structures for heavy and light concretes without of prestressing of reinforcement [in Russian]. TsITP. Moscow, 1989.
- [3] Himmelblau D. Applied non-linear programming. MIR. Moscow, 1975.
- [4] Zalesov A.S., Kodish E.N., Lemesh L.L., Nikitin I.K. Calculation of reinforced concrete structures on strength, crack resistance and strains [in Russian]. Stroyisdat. Moscow, 1988.
- [5] Djakonov V.P. Reference book for application of system «EUREKA» [in Russian]. Nauka Moscow, 1993.
- [6] Zalesov A.S., Klimov Y.A. Strength of reinforced structures under the action of cross forces. Budivelnik. Kiev, 1989.