

**Zeitschrift:** Helvetica Physica Acta  
**Band:** 65 (1992)  
**Heft:** 2-3

**Artikel:** Observing an Ising transition in Josephson-junction arrays  
**Autor:** Eikmans, H. / Himbergen, J.E. van  
**DOI:** <https://doi.org/10.5169/seals-116447>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 15.01.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Observing an Ising transition in Josephson-junction arrays

H. Eikmans and J. E. van Himbergen

Institute for Theoretical Physics, P.O.Box 80.006, 3508 TA Utrecht, The Netherlands

**Abstract.** *Using dynamic simulations we study electric and magnetic ac response of a Josephson-junction array near an Ising transition. The transition is visible in the in-phase component but we see no significant increase in the dissipation.*

We consider a rectangular lattice of superconducting islands, each of which is connected to nearest neighbors by Josephson junctions. The island centered at e.g.  $\mathbf{r}$  is described by one parameter  $\varphi(\mathbf{r}, t)$ . The time evolution of the phase difference across junction  $\langle \mathbf{r}, \mathbf{r}' \rangle$  is governed by:

$$\dot{\varphi}(\mathbf{r}) - \dot{\varphi}(\mathbf{r}') = i(\mathbf{r}, \mathbf{r}') - \sin(\varphi(\mathbf{r}) - \varphi(\mathbf{r}') - 2\pi A(\mathbf{r}, \mathbf{r}')) - i_F(\mathbf{r}, \mathbf{r}', t) \quad (1)$$

Time is measured in units of the reciprocal characteristic frequency  $1/\omega_c = \hbar/(2eI_cR_n)$ , with a single-junction critical current  $I_c$ , and normal-state resistance  $R_n$ . We allow for a magnetic field perpendicular to the plane of the array, and this enters through the variables  $A(\mathbf{r}, \mathbf{r}') = \frac{1}{\phi_0} \int_{\mathbf{r}}^{\mathbf{r}'} \mathbf{A} \cdot d\mathbf{l}$ , with vector potential  $\mathbf{A}$ . The physical quantity is  $f$ , the magnetic flux piercing a unit cell of the array, in units of the elementary flux quantum  $\phi_0$ . The total current carried by the junction is  $i(\mathbf{r}, \mathbf{r}')$ , in units of  $I_c$ . For non-zero temperature there is a fluctuating current  $i_F$ , which we take to be a white-noise source. The Langevin equations for different junctions are coupled because the total current entering each island has to be zero at each instant of time. This coupled set, describing the *full dynamics* of junction arrays, can be simulated very efficiently using realistic boundary conditions, with an algorithm introduced earlier [1].

We apply the algorithm to the special case of a generalization of the fully frustrated Josephson-junction array [2]. In this model the horizontal junctions,  $\langle \mathbf{r}, \mathbf{r} + \hat{\mathbf{x}} \rangle$ , alternately have critical current  $I_c$  and  $\eta I_c$ , and all vertical junctions have critical current  $I_c$ . There is a magnetic field with  $f = \frac{1}{2}$ . The fully frustrated array,  $\eta = 1$ , shows one phase transition with both Ising-like and Kosterlitz-Thouless (KT)-like features [3]. For  $\eta \neq 1$  the transition splits in an Ising and a KT transition [2], and in an earlier paper we explained the origin of this transition using a Coulomb-gas analysis [4]. In particular, we showed that the Ising transition originates from small vortex dipoles, formed at the horizontal junctions with the smaller critical current. One can build an array with  $\eta \neq 1$  by varying the surface area of selected junctions. This provides the possibility to measure the Ising transition in experiments on junction arrays.

One manifestation of the transition is as a kink in the helicity modulus [4], and as a first attempt one can try to observe the transition by measuring the non-linear resistance of arrays. However, preliminary results show that this is hard in practice as the effect is very subtle [5]. Therefore we consider the response of the array with  $\eta = 0.5$  to a small oscillating signal, which may be either a magnetic field or a current. First we concentrate on the measurements with a magnetic field, because they have been performed very successfully to observe the KT transition [6]. Results of extensive simulations in a  $16 \times 16$  array showed that the effect of the edges is large if the field is uniform over the array. Consequently, we consider here a  $32 \times 32$  array with the field amplitude decreasing smoothly to zero near the edges. In Fig. 1a we show the results of the in-phase, and out-of-phase component of the magnetization  $\mu$  of the current distribution,  $\chi'_\mu$  and  $\chi''_\mu$ , respectively. The amplitude of oscillations in  $f$  in the center of the array is  $5 \cdot 10^{-3}$ . From Monte Carlo simulations we know that the Ising transition occurs at approximately  $T = 0.18$ . The results clearly show a kink in  $\chi'_\mu$  at the Ising point. Because the oscillating field induces complicated current patterns,  $\chi'_\mu$  is a linear combination of all components of the helicity modulus  $\Gamma(\mathbf{k})$ . A priori it is not clear that this will also show the kink, present in the helicity modulus in the  $x$ -direction which is  $\lim_{k_x \rightarrow 0} \Gamma(k_x, k_y = 0)$ . Unfortunately the Ising transition does not clearly show in  $\chi''_\mu$ . The same lack of features in  $\chi''_\mu$  is observed at higher frequencies. Next we try to gain more insight by considering the response of the average phase difference  $\Phi$  across the array in the  $x$ -direction to an oscillating current in the same direction. The lattice size is  $L = 16$  and

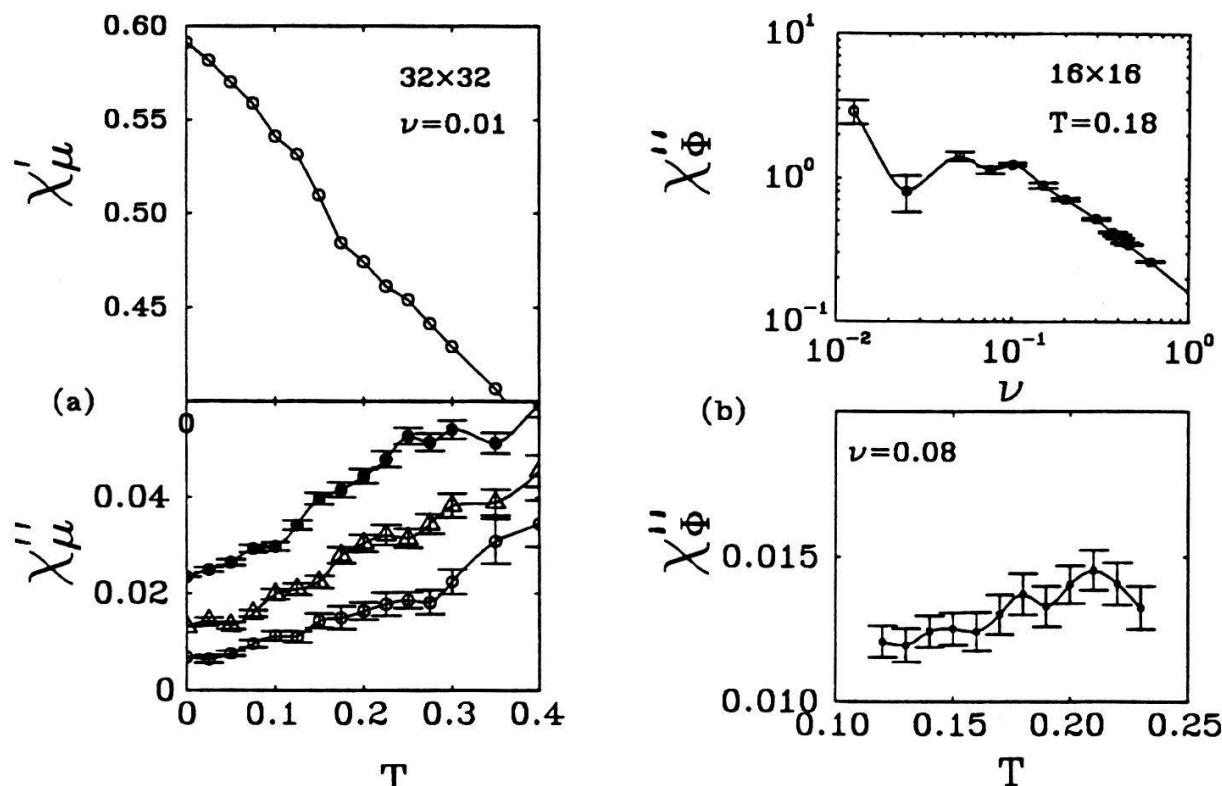


Figure 1: The response to a small oscillating magnetic field (a) for frequencies  $\nu = 0.01$  ( $\circ$ ),  $0.02$  ( $\Delta$ ), and  $0.04$  ( $\bullet$ ), in units of  $\omega_c/2\pi$ . The normalization factor is  $f \cdot (\partial\mu/\partial f)|_{f=0}$ , where  $\mu$  is the magnetization of the ground state current distribution. Figure b gives the response of  $\Phi$  to an oscillating current in the  $x$ -direction.

the amplitude of the total external current is  $0.01I_c \times 16$ . In Fig. 1b we show the frequency dependence of  $\chi''_\Phi$  at  $T = 0.18$ . The frequency dependence is very smooth and the shape does not have strongly temperature dependent features. We also plot  $\chi''_\Phi$  at  $2\pi\nu = 0.08\omega_c$ . Clearly, this measuring technique does not improve the results drastically and there is still no clear sign of the Ising transition.

The above results indicate that the Ising transition may be too weak to be observed experimentally in the out-of-phase component. These results were obtained for frequencies  $\leq 0.08\omega_c$ , because in this range the kink in the in-phase component was most prominent. To exclude the possibility that the transition shows in a different frequency regime, we are presently studying the time correlation functions of  $\mu$  and  $\Phi$ . These functions cannot be measured directly but through the fluctuation-dissipation theorem, the cosine Fourier transforms are directly proportional to  $\chi''_\mu$  and  $\chi''_\Phi$  respectively. The major advantage of this method is that one simulation run gives a frequency spectrum instead of one data point at one particular frequency, as in the top graph of Fig. 1b.

We are grateful to A.F.M. Arts for very useful discussions.

## References

- [1] H. Eikmans and J. E. van Himbergen, Phys. Rev. B **41**, 8927 (1990).
- [2] B. Berge, H. T. Diep, A. Ghazali and P. Lallemand, Phys. Rev. B **34**, 3177 (1986).
- [3] See e.g. J.M. Thijssen and H.J.F. Knops, Phys. Rev. B **42**, 2438 (1990), and references therein.
- [4] H. Eikmans, J. E. van Himbergen, H. J. F. Knops, and J. M. Thijssen, Phys. Rev. B **39**, 11759 (1989).
- [5] H.S.J. van der Zant and J.E. Mooij, private communications.
- [6] P. Martinoli, Ph. Lerch, Ch. Leemann, and H. Beck, Jpn. J. Appl. Phys. **26**, Suppl 26-3, 1999 (1987).