

**Zeitschrift:** Swiss express : the Swiss Railways Society journal  
**Herausgeber:** Swiss Railways Society  
**Band:** 1 (1986-1987)  
**Heft:** 9

**Artikel:** Lima Bm 4/4 conversion  
**Autor:** Watson, Graham  
**DOI:** <https://doi.org/10.5169/seals-853699>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**


L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 16.03.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## LIMA Bm 4/4 CONVERSION by Graham Watson

Before the Lima Bm 4/4 was released, I had been thinking about making one, using a modified proprietary chassis as a basis. I obtained plans of the Bm 4/4 from S.B.B., who were as usual very helpful, reduced them from 'O' scale to HO (Courtesy of a friendly local printer), and selected the chassis. I was plucking up courage to make a start, when Lima released their model which seemed to nullify my efforts to date. I bought one, and whilst I was reasonably happy with it, I felt it could be improved, and started thinking back to my original ideas. The chassis I had selected was Fleischmann's DB class 212 Bo-Bo diesel (Cat. No. 4230). I've always been a fan of Fleischmann running qualities and the dimensions and wheel spacing seemed just about right, also the Bm 4/4 body was high enough to accommodate the motor at the cab end. Comparing the Lima model and the chassis, I found that apart from removing a fair bit of metal from the chassis, modification seemed fairly easy.


### Body

Remove body from chassis, by removing buffers and mounting screw beneath the chassis. The body and running plate are two mouldings which clip together. Begin by cementing them together and cementing the buffers into their respective holes. Some readers may wish to fill the screw holes in the chassis, re-drill, re-tap, and re-fit the metal Fleischmann buffers. If you are up to this it is a better idea because it gives one a better body/chassis securing method. It relieves strain on the single chassis/body screw if one is liable to pick up the finished loco by the body. This can result in the plastic mounting pillar parting from the body moulding after a time, particularly if you have over-tightened the screw at any time. However the earlier method will suffice if you are careful not to over-tighten the screw and to pick up the model as a whole. Once the body and running plate have set (and buffers if you choose this method) remove any projecting lugs, buffer ends, and any other knobs and lumps from beneath the running plate, leaving a clean flat surface. Although the model will now have a metal chassis you can utilise the weight mounted in the 'nose' of the DB body, by glueing it in place in the nose of the Bm 4/4 body for additional traction weight. This completes work on the body apart from replacing plastic hand rails with wire ones and the addition of new number and works plates of your choice.



### Chassis

Strip this down to the bare chassis plate, by removing the lamps and wiring, (these are not required, at least I couldn't fathom a way of using them without cluttering up the shunters platforms with obvious wiring), unscrew the bakelite plate and bogie securing screws (underneath motor bogie and on top of pick-up bogie). Both bogies complete with wiring can now be lifted out carefully through the top of the chassis plate, and placed to one side. Swivel bogie frames  $45^{\circ}$  to one side and remove from below chassis plate. You are now ready to start 'carving'! If you are a dab hand with a file, all well and good, if not, like me, then use a linisher or belt sander. This does the job quickly and accurately and leaves a fine finish. But watch your fingers, things get very hot, so do it in short bursts and allow to cool down between. The sketches will show you what is required, but basically one must reduce overall width to 33mm with a chamfer at each end reducing width to 24mm. The side steps and battery box will also be reduced and the steps should virtually disappear. The main work is in reducing depth, and there is a fair bit to come off here. Aim at a completely smooth flat plate (top) with a depth of about 4mm near the battery boxes. When fitted to the body, it should tuck up nicely

TOP VIEW OF ORIGINAL CHASSIS, SHADED AREAS TO BE REMOVED.

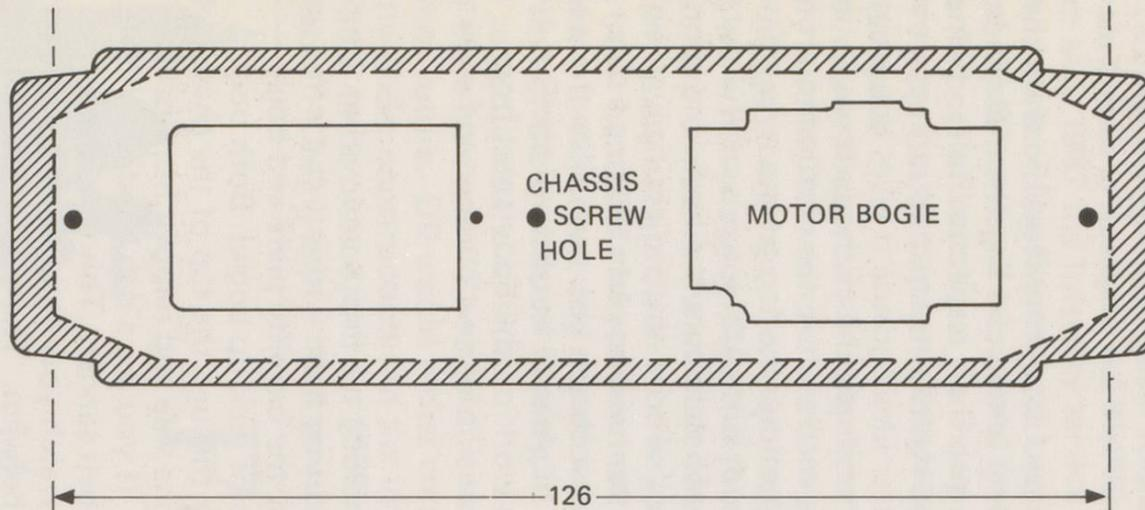


CENTRAL CHASSIS WEIGHT, SHADED AREA TO BE REMOVED, TO CLEAR CENTRAL PILLAR AND CHASSIS MOUNTING SCREW.

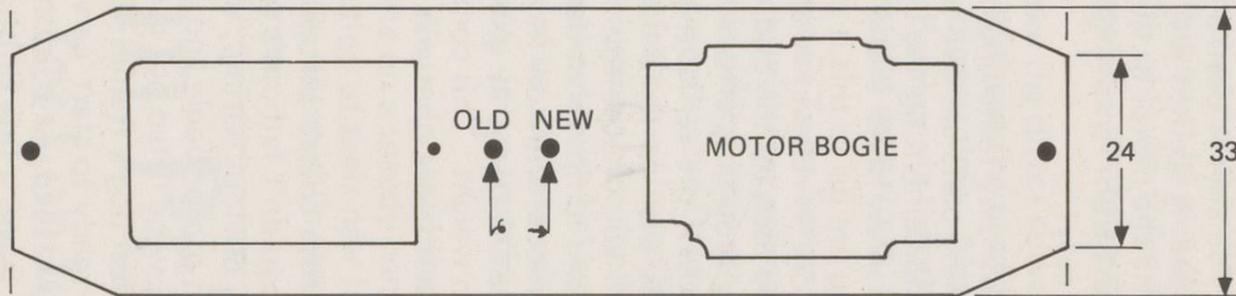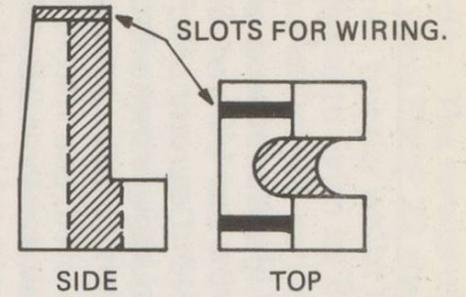

TOP VIEW OF MODIFIED CHASSIS.

FILL, RE-DRILL, AND TAP, TO FIT FLEISCHMANN BUFFERS. (If required).

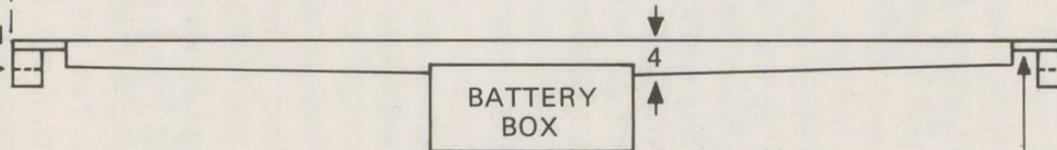

SIDE VIEW OF MODIFIED CHASSIS.

KEEP CHECK ON THICKNESS AT THIS POINT WHEN REMOVING METAL.

\* ALL DIMENSIONS IN MILLIMETRES.

Drawing Author.

behind the skirt of the running plate with little visible except near the battery boxes. A new 3mm dia. hole should be drilled under the chassis for the central mounting screw, 6mm nearer the motor end, to line up with the plastic mounting pillar in the body. The central weight of the Fleischmann chassis must also be cut/filed to clear this pillar. In addition I cut two slots in the top of the weight for the motor leads to keep things tidy. The Fleischmann couplings can be used if one uses the original keeper plate from the platform assembly, trimmed and glued in place.

#### The Bogies

Grind/file down the detail on the bogie side frames, leaving a nice flat surface, but not so thin that it is likely to break easily. Remove the plastic bogie frames from the Lima model and cut away the mounting lugs on top. All you need are the side frames with the spacers at either end, this helps remount the snow ploughs. Remount the metal bogie frames to the chassis before you fit the plastic ones. This is because the extra length of the plastic side frames does not allow you to rotate the metal ones through 45° to refit. After test-fitting the plastic side frames over the reduced metal ones making adjustments if necessary, glue in place. Cut plastic card to fit over the battery box sides to represent the box lids. A coat of grey paint over chassis sides and bogie frames and that's it. You will see that you can use most of the Fleischmann chassis and its parts (apart from the lamps) and that the motor barely projects into the cab and is hardly noticeable.

I now have a Bm 4/4 that is almost silent, smooth and powerful. Although not intended for it, it will haul a fair length train around by rather steep climbing curves at the ends of my alpine layout, and is controllable down to an absolute crawl which makes shunting very easy and realistic. This was my first serious attempt at a conversion and one that I found easier than I thought and very satisfying.

# VICTORS

## JUST THE BEST!

166 Pentonville Road Islington London N1 9JL  
Telephone 01-278 1019

**COME AND VISIT OUR BEAUTIFUL NEW SHOP!**

**NEW LOOK SAME ADDRESS SAME SUPER STOCK SAME EXTRA LOW PRICES!**

**The Specialists in European models and books for all your Swiss modelling requirements.**

#### **We stock the following makes suitable for the Swiss modeller:**

Bemo, Brawa, Brekina, DJH, Electrotren (all non Spanish items), Faller, Fleischmann, Fulgurex, Hag, Hartel (street track), Heljan, Herpa, Hobbytrain/Kato, Ibertren (all non Spanish items), Jouef, Kadee, Kibri, Lemaco, Lilliput, Lima, Marklin, Marks (N gauge painted metal cars), Metropolitan, Minitrix, MKD, Panier, Pola, Praline, Preiser, Rietze (cars), Ribu, Riverossi, Roco, Roskopf (cars), Roxy, Sommerfeldt, Speith, Train Roueseau, Trix, Vollmer, Wiking, Woodland Scenics.

**Looking for ideas and inspiration? The following magazines keep you informed on how to model the Swiss scene as well as keeping you abreast of the latest developments on the prototype:**

Die Modell Eisenbahn, Eisenbahn Amateur, Schweizer Eisenbahn Review, Voies Ferrees, Continental Modeller and Euromodel Rail Review.





#### **Plus many books from:**

Albe/Franch, Orell Fussli, Schweers and Wall, Theo Stolz and Verlag Eisenbahn.

Please add 75p per order to cover postage and packing. We are open Monday to Saturday from 10.00am till 5.30pm.

Special discount for Swiss Society members. Telephone for details.

Phone orders for payment by Visa, Access or Amex can be accepted. Nearest underground station Kings Cross.

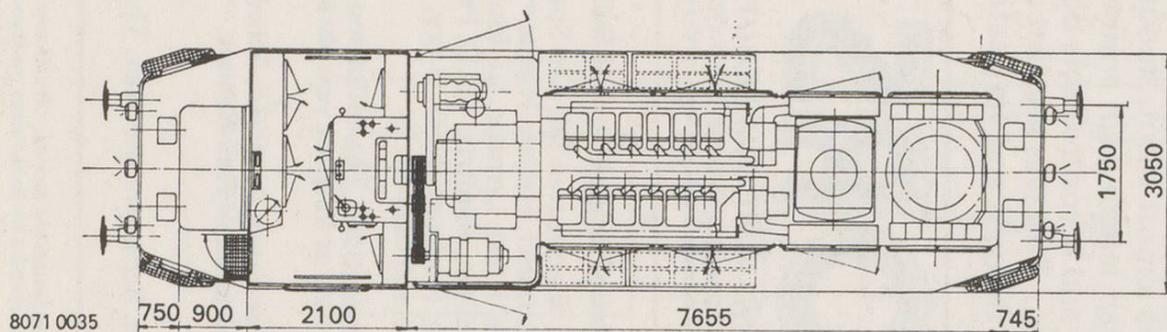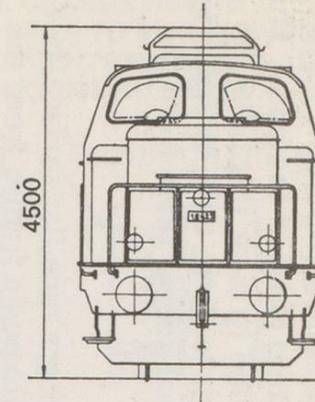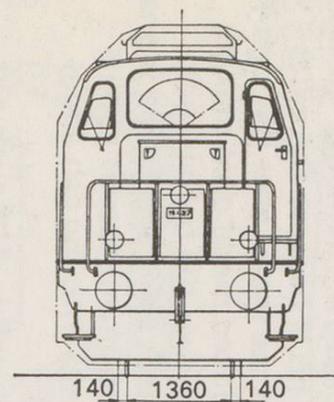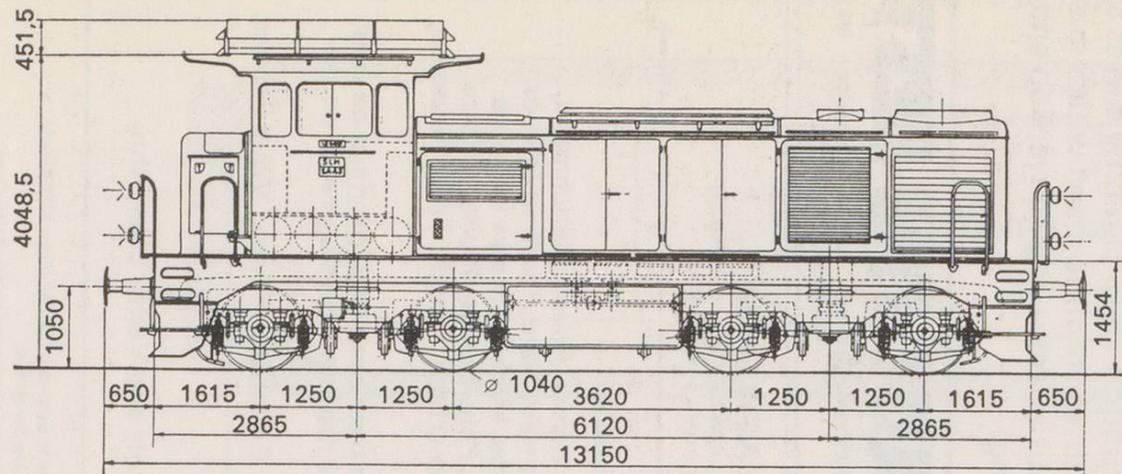

*Rated output (according to UIC)*

- diesel engine at 1200 rpm 880 kW
- one-hour at the wheel 620 kW

*Tractive force at the wheel*

- continuous 108 kN
- one-hour 127 kN
- maximum 216 kN

*Speed*

- continuous 22.5 km/h
- one-hour 17.5 km/h
- maximum 75 km/h

*Weight in running order  
(incl. supplies)*

72 t

*Transmission ratio*

1:5.93

*Gauge*

1435 mm

**SLM**<sup>®</sup>

Swiss Locomotive and Machine Works  
CH-8401 Winterthur