

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 82 (1999)

Artikel: Cable-stayed bridges with special features
Autor: Schlaich, Jörg
DOI: <https://doi.org/10.5169/seals-62101>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 07.02.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>




Cable-Stayed Bridges with Special Features

Jörg SCHLAICH

Prof. Dr.-Ing.

Schlaich Bergemann und Partner
Stuttgart, Germany

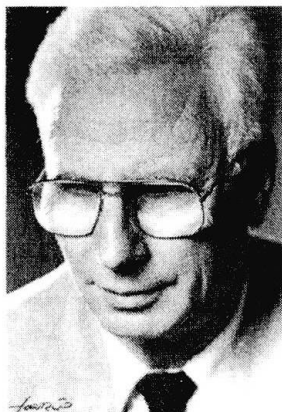

Jörg Schlaich, born 1934 received his civil engineering degree from the Univ. of Berlin and his Dr.-Ing. from the Univ. of Stuttgart, Germany. Since 1974 he is professor and director of the Institute for Structural Design, Univ. of Stuttgart and since 1980 partner of Schlaich Bergemann und Partner, Consulting Engineers, Stuttgart, Germany.

Abstract

Usually if we speak of cable-stayed bridge design parameters, we have their cable-arrangement, pylon-geometry, the cross-sections and the materials of their deck etc. in mind. But the overall layout is considered to be more or less invariable: a three-span arrangement with two pylons, a main-span and two holding down side-spans, and occasionally half of that with one pylon.

However, the cable-stayed bridge concept offers more and can adapt to very special boundary conditions, from local availability of only certain materials or wires to unusual topographical conditions.

The outcome may be e.g. one out of a large number of feasible multi-span arrangements, or a combination of cable-stayed and cable-supported. Other situations may call for cable-stayed bridges, where the deck is not straight in plan but curved, resulting in a horizontal arching action or even for convertible or folding decks.

The author has collected some experience with such special features and will exemplify them by several projected or really built large and small cable-stayed bridges such as the Hooghly Bridge in Calcutta (the first composite-deck cable-stayed bridge with a rivetted steel deck), the Evripos Bridge in Greece (with a solid concrete slab deck), the Argen Bridge in Germany (combining cable-stayed with cable-supported), the Ting Kau Bridge in Hong Kong (with 3 masts and 4 spans), the Fjörde Bridge in Kiel, Germany (a cable-stayed folding bridge) etc..

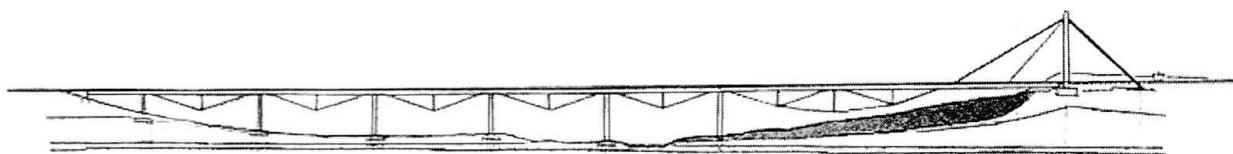


Fig. 1: "Obere Argen Bridge": Proposal

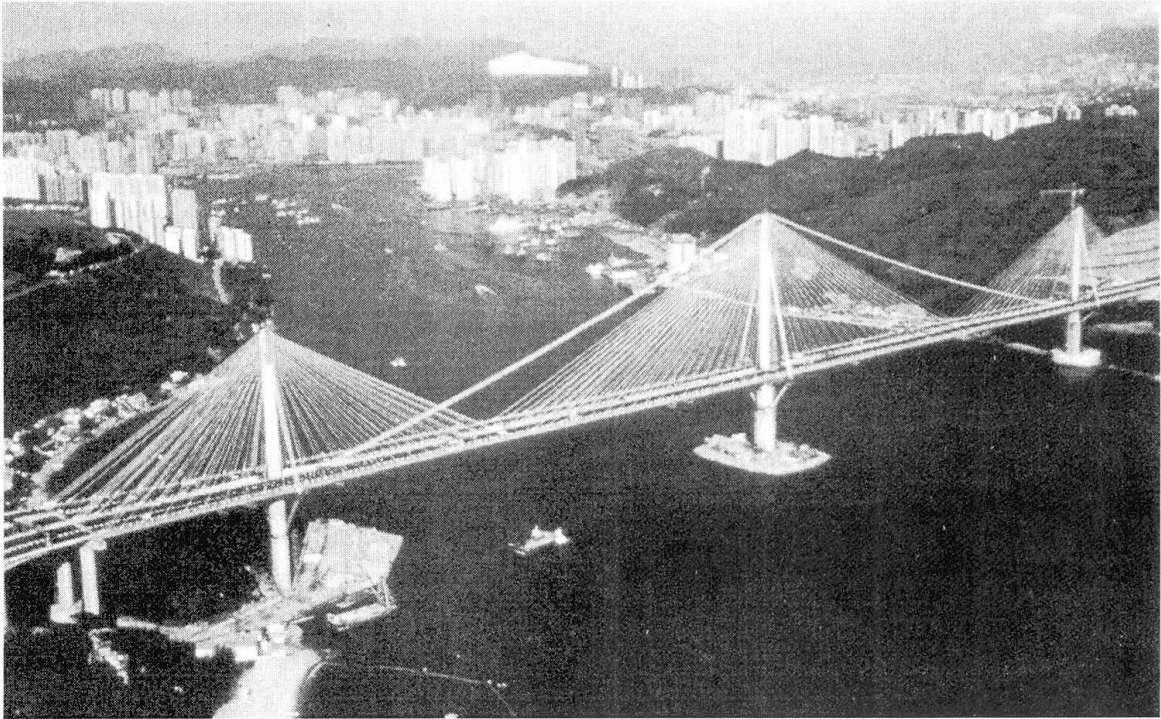


Fig. 2: Ting Kau Bridge, Hong Kong, completed 1998

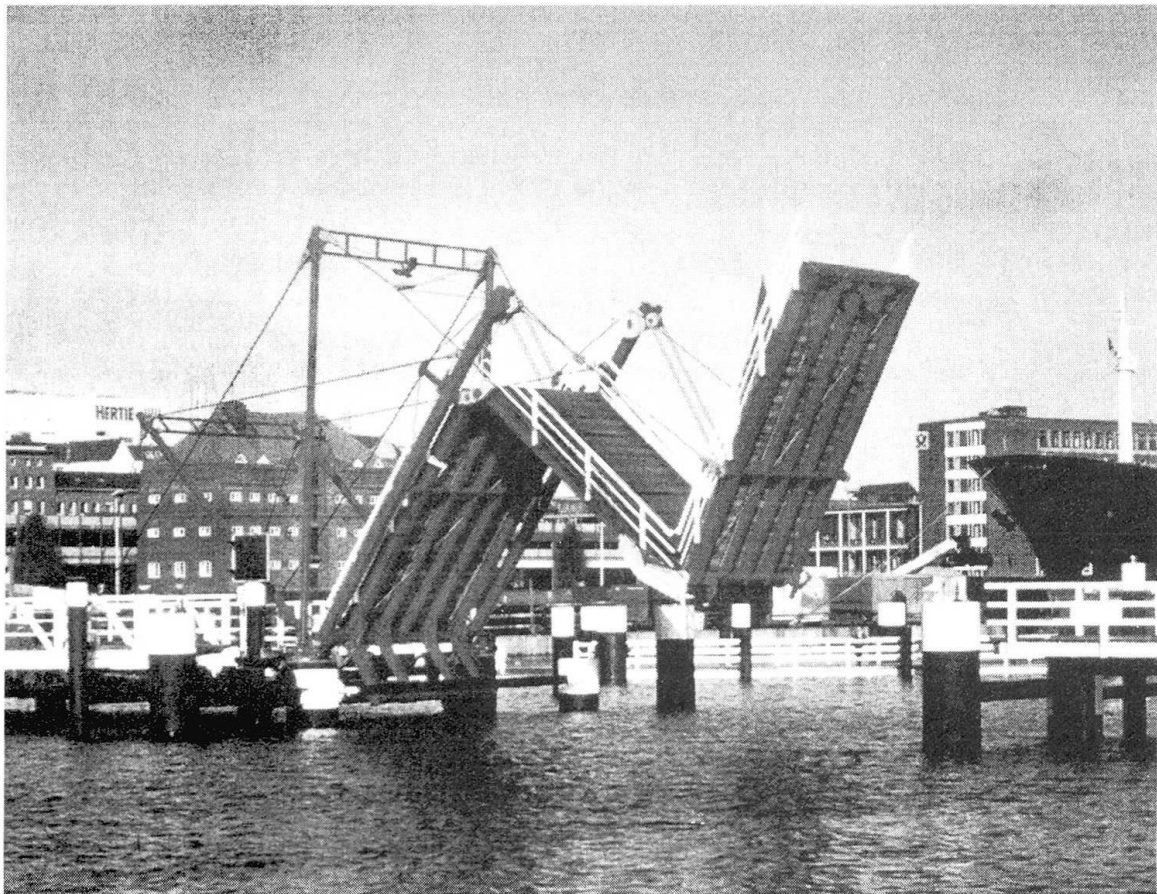


Fig. 3: Folding Bridge, Kiel, completed 1998