

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 77 (1998)

Artikel: Dynamic characteristics as indicator of structural integrity
Autor: Sigmund, Vladimir / Herman, Krešimir
DOI: <https://doi.org/10.5169/seals-58185>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 01.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Dynamic Characteristics as Indicator of Structural Integrity

Vladimir SIGMUND

Assist. Professor
University of Osijek
Osijek, Croatia

Krešimir HERMAN

Professor
University of Zagreb
Zagreb, Croatia

Summary:

Detecting structural state of historical monuments and their adequate strengthening is very complex problem and requires cooperation among various specialists. Knowing the real state of historical monuments is very important before and after the strengthening and can only be established experimentally. Dynamic tests can reveal us the structural state without any damage to the structure. Usage examples of various dynamic tests, performed in order to determine dynamic characteristics and to conclude about the structural behavior and state, are outlined. Measured dynamic characteristics are then used to formulate precise mathematical model on which simulations of the extreme actions can be done. By collecting and statistically analyzing the measured data broader knowledge about the previous building methods can be gained and, many times, learned on the knowledge of old builders.

Keywords: historical monuments, structural state, dynamic tests, test-analysis correlation

1. Ferhad-Pasha Mosque

Experimental results indicated poor structural state and they were used to establish a real distribution of mass and stiffness along the height and to attribute earthquake forces, according to the real stiffness distribution. By knowing the measured results, reliable mathematical model could have been established and further analytical studies were made. Seismic strengthening was necessary and the chosen strengthening method did not disturb the mosque's historic value and was simple enough for construction.

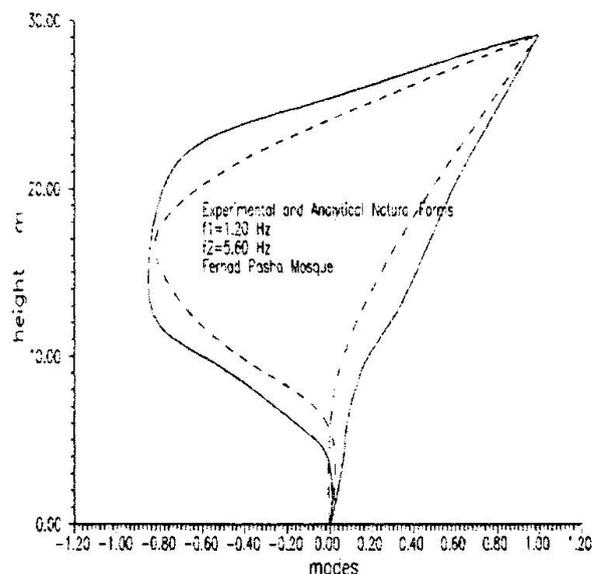


Fig. 1 Calculated and measured mode forms

2. Retaining Wall Structure on the Maria Luisa Road

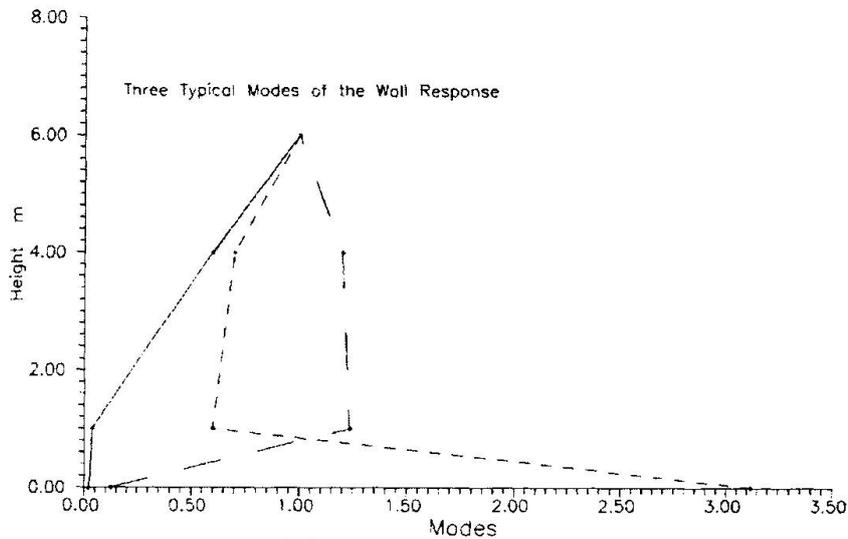


Fig 2. Three typical measured mode forms

Dynamic testing of the wall sections was performed as the only applicable method for evaluation of the structural state. Two methods were applied: (a) impulse tests and (b) transfer function test. As a result of both methods, wall response to dynamic excitation along the height was obtained, and the mode shapes of vibration

could have been established. From the measured mode shapes, three main cases of the wall displacements could have been established and stability of the wall sections estimated on the ground of the measured quantity:

3. Mostar's Old Bridge

The measured mode shapes revealed that for vertical loading bridge behaves as an arch but of a smaller span, while for the perpendicular direction it behaves as a beam with fixed supports. Based on the experimental results, analytical model was modified until a satisfactory correlation among measured and analytical results was achieved.

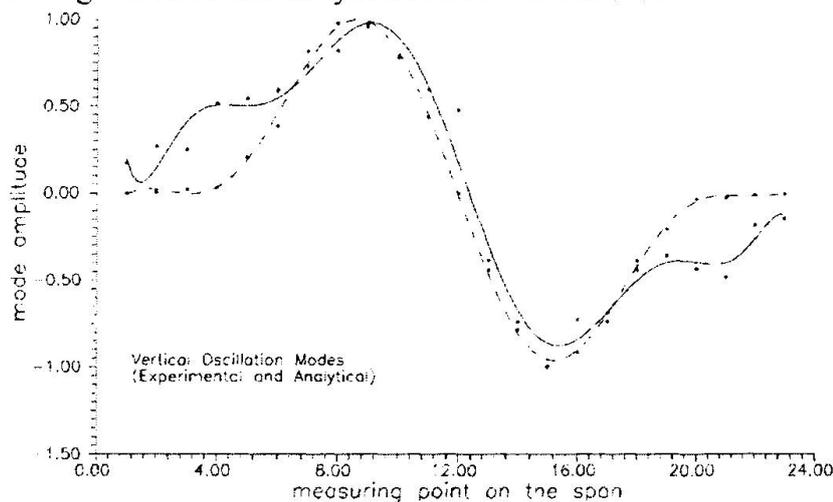


Fig. 3 Vertical mode shapes

Good correlation is obvious, and such mathematical model could be used for structural analysis and to check the influence and meaning of the various strengthening methods.

Dynamic characteristics reveal the most important structural data and represent the "personal" card of the structure. Changes in: measured mode shapes indicate change in strength distribution and reveal the real strength distribution; damping characteristics indicate change in the homogeneity; natural frequencies indicate change in the overall structural state.